




CTB5DSTBKE, BLE, NGE, RDE, RGE, WH

5 Drawer Pro Series Slide Top Service Cart w/ Power Strip

ASSEMBLY INSTRUCTIONS

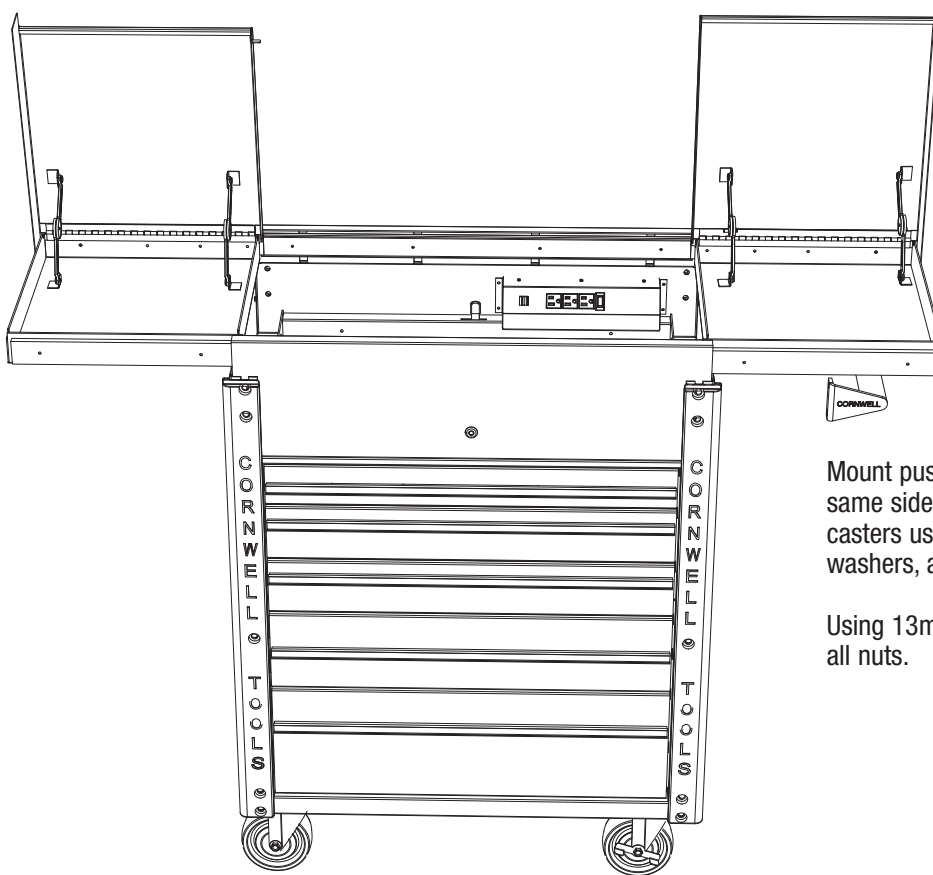

Mount push handle (Part #5) to the same side of the cart as the locking casters using the four stove bolts, washers, and nuts provided.

Using 13mm socket completely tighten all nuts.

! WARNING



- Read and follow all instructions in User's Manual.
- Do not load carts beyond rated capacity:
Maximum Total Net Load 700 Lbs.
Top Tray (Slide Top) 100 Lbs.

PLEASE NOTE: Loading cart beyond rated capacity may cause structural damage to the cart as well as personal and/or property damage. Please educate your customers to the "dangers of overloading".

- Lock lid and drawers before moving.
- Apply brake on locking casters anytime cart is in place.
- Do not pull cart. Push from handle on end to move.
- Units can tip or fall causing damage or personal injury.
- Cart is designed to roll easily on flat surfaces and should not be used on uneven or inclined surfaces.
- Do not open more than one loaded drawer at a time.
- Do not stand on or step in drawers.
- Keep children away from unit.
- Wear gloves when lifting edges.
- This product may contain one or more chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. *Wash hands thoroughly after handling.*
- Failure to heed these warnings may result in personal injury and/or property damage.



CTB5DSTBKE, BLE, NGE, RDE, RGE, WH 5 Drawer Pro Series Slide Top Service Cart w/ Power Strip


HARDWARE SPECIFICATIONS



1 x 4 pcs.
Flat washer



2 x 4 pcs.
Nylon nut



3 x 4 pcs.
M8 bolt (6mm-19mm)

TROUBLESHOOTING

Problem: Drawers appear not to fit, do not slide in accurately and bump the cart sides.

Solution: The roller bearing slides must be fully engaged into the mounting slots on all drawers. They potentially could fall out of position during shipment. Check the side of the cart to determine which slide is out of position.

Remove the drawer that is out of position. The drawer is removed by the two clips on the actual roller bearing slide.


Simply push the roller bearing slide back down into position.

Insert the drawer back onto the roller bearing slides.

Problem: Back Lock/Unlock Switch does not engage the drawer.

Solution: The inside Lock/Unlock slide potentially could fall out of its groove during shipment. Unscrew the four screws that are holding the Lock/Unlock slide in place.


Once the screws are removed, simply place the latch back onto the slide and tighten the four screws back down.

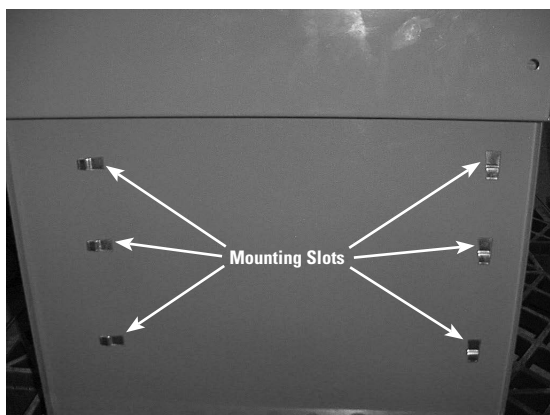

PARTS LIST

CTB5DSTBKE, BLE, NGE, RDE, RGE, WH

5 Drawer Pro Series Slide Top Service Cart w/ Power Strip

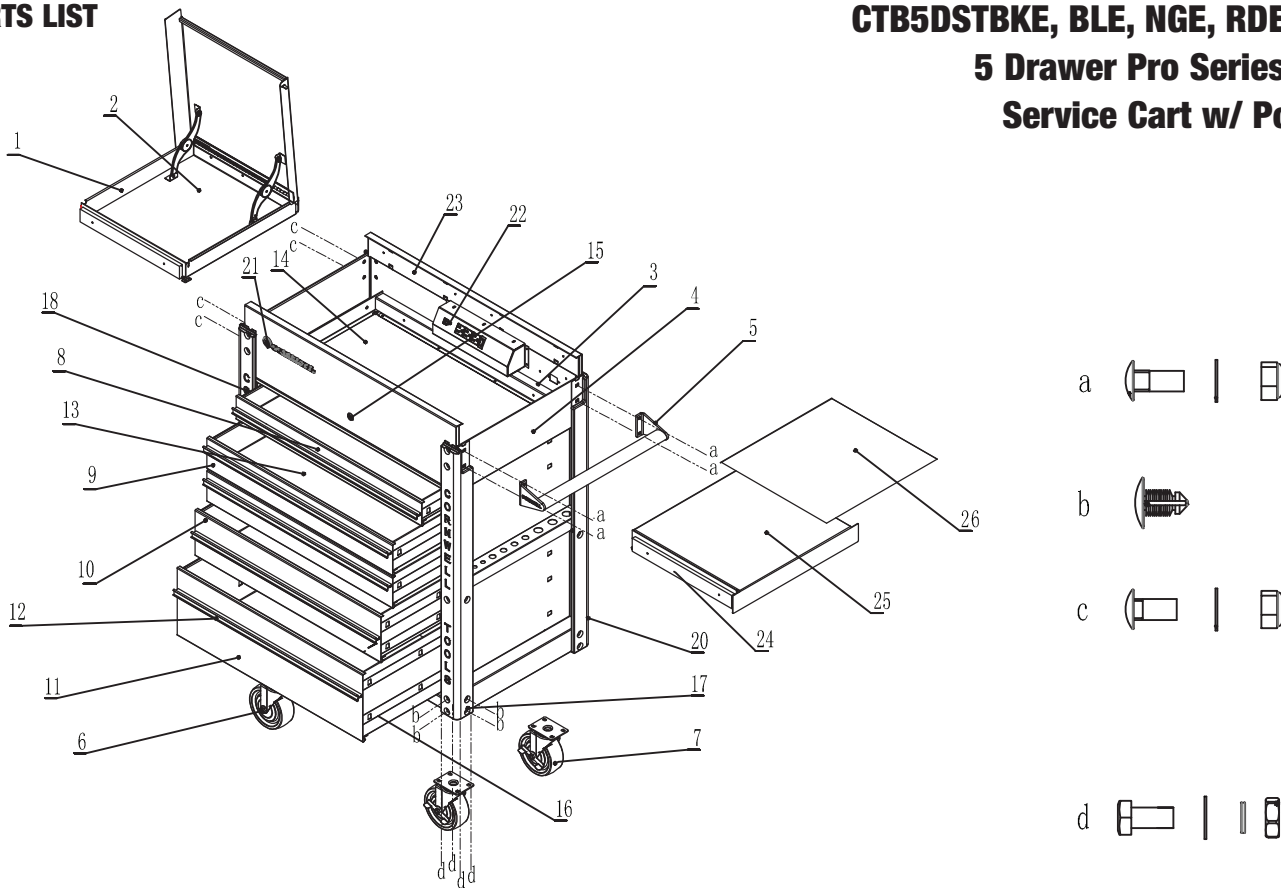

Item #	Part #	Description	QTY.	Item #	Part #	Description	QTY.
1	CTB5DLSTFBBK CTB5DLSTFBBL CTB5DLSTFBRD CTB5DLSTFBRG CTB5DLSTFBNG CTB5DLSTFBWH	Left sliding top file box	1	12	RSMM100DH RSMM100DHBK RSMM100DHL	Drawer handle (Alum.) Drawer handle (Black) Drawer handle (Blue)	5 5 5
2	RSFBEL	File box eva liner	2	13-14	RSSTFB8ELK	8 Pack of EVA liners	1 set
3	RSLMC500BKN RSLMC500BLN RSLMC500RDN RSLMC500RGN RSLMC500NGN RSLMC500WHN	Locking mechanism (excl lock w/ keys)	1	15	RS5DSTLKS	Lock with keys	1
4		Cart frame	1	16	RSRBS RSRBSDET8PK	Roller bearing slides Ball bearing slide detents (Package of 8)	7 1
5	CTBMMHDK	Push handle and bracket kit	1	17	RSMM700BPRF	Right front bumper	1
6	CTBMM100FC	5" fixed caster	2	18	RSMM700BPLF	Left front bumper	1
7	RSSWLC	5" swivel caster with lock	2	19	RSMM700BPLR	Left rear bumper	1
8	CTBMM5003DBK CTBMM5003DBL CTBMM5003DRD CTBMM5003DRG CTBMM5003DNG CTBMM5003DWH CTBMM5004DBK CTBMM5004DBL CTBMM5004DRD CTBMM5004DRG CTBMM5004DNG CTBMM5004DWH	3" drawer 4" drawer	1 2	20	RSMM700BPRR	Right rear bumper	1
9				21	RSMM100CLP	Logo plate	1
10	CTBMM5006DBK CTBMM5006DBL CTBMM5006DRD CTBMM5006DRG CTBMM5006DNG CTBMM5006DWH	6" drawer	1	22	RS50022	Power strip	1
11	CTBMM5009DBK CTBMM5009DBL CTBMM5009DRD CTBMM5009DRG CTBMM5009DNG CTBMM5009DWH	9" drawer	1	23-24	RSTFBSLIDE	Top file box slides	1 pair
				25	CTB5DRSTFBBK CTB5DRSTFBBL CTB5DRSTFBRD CTB5DRSTFBRG CTB5DRSTFBNG CTB5DRSTFBWH	Right sliding top file box	1
				26	RSSTPVCL	Sliding top PVC liner	2
				a	RSMM700BK2	Hardware kit for push handle (Including 4 each of Bolts 6mm-19mm, Flat washers, Nylon nuts)	1 set
				b	RSMM500BF	Bumper fastener	32
				c	RSMM700BK1	Hardware kit for the opposite side of push handle (Including 4 each of bolts 3-17mm, Flat washers, Nylon nuts)	1 set
				d	RSMM700BK3	Hardware kit for caster (Including 16 each of Hex bolt M8x16, 16 flat washers, 16 Spring washer)	1 set

ALSO AVAILABLE:

RSMM100DHP - End cap for drawer handle
RSFBBRACE - File box brace
RS50022PC - Power cord for power strip