


INSTRUCTION MANUAL




1725 HYDRAULIC FOOT PUMP

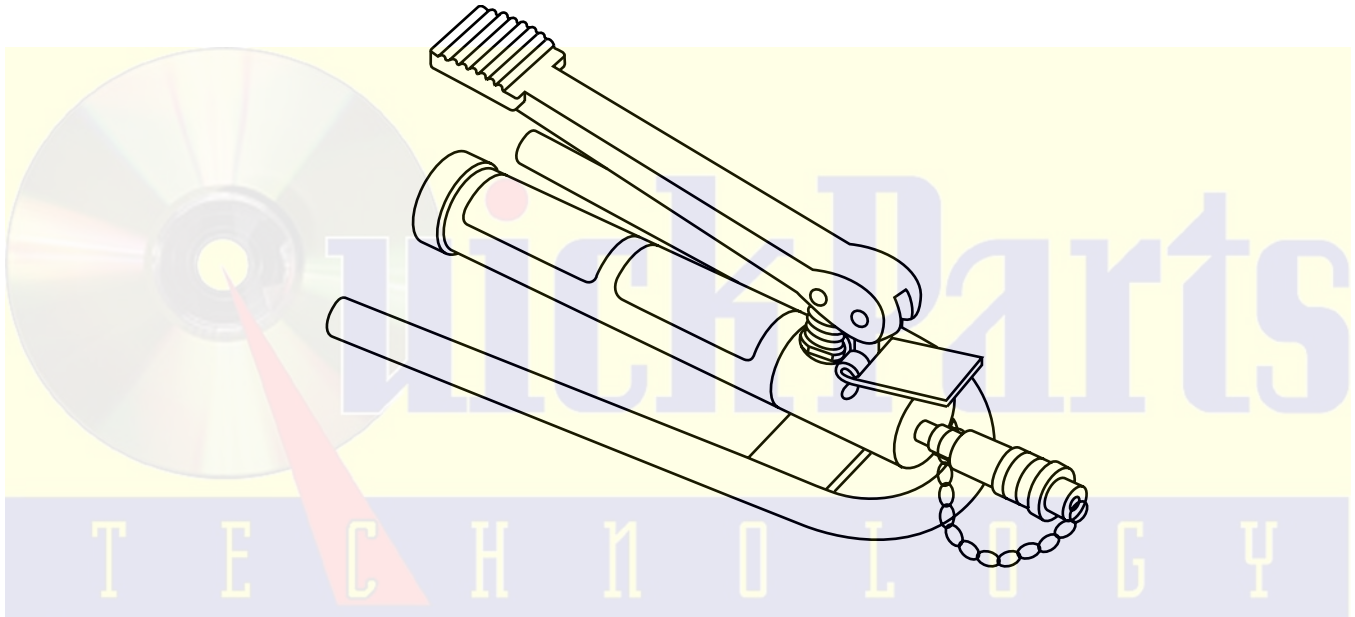

Read and understand all of the instructions and safety information in this manual before operating or servicing this tool.

1725 Hydraulic Foot Pump—Exploded View

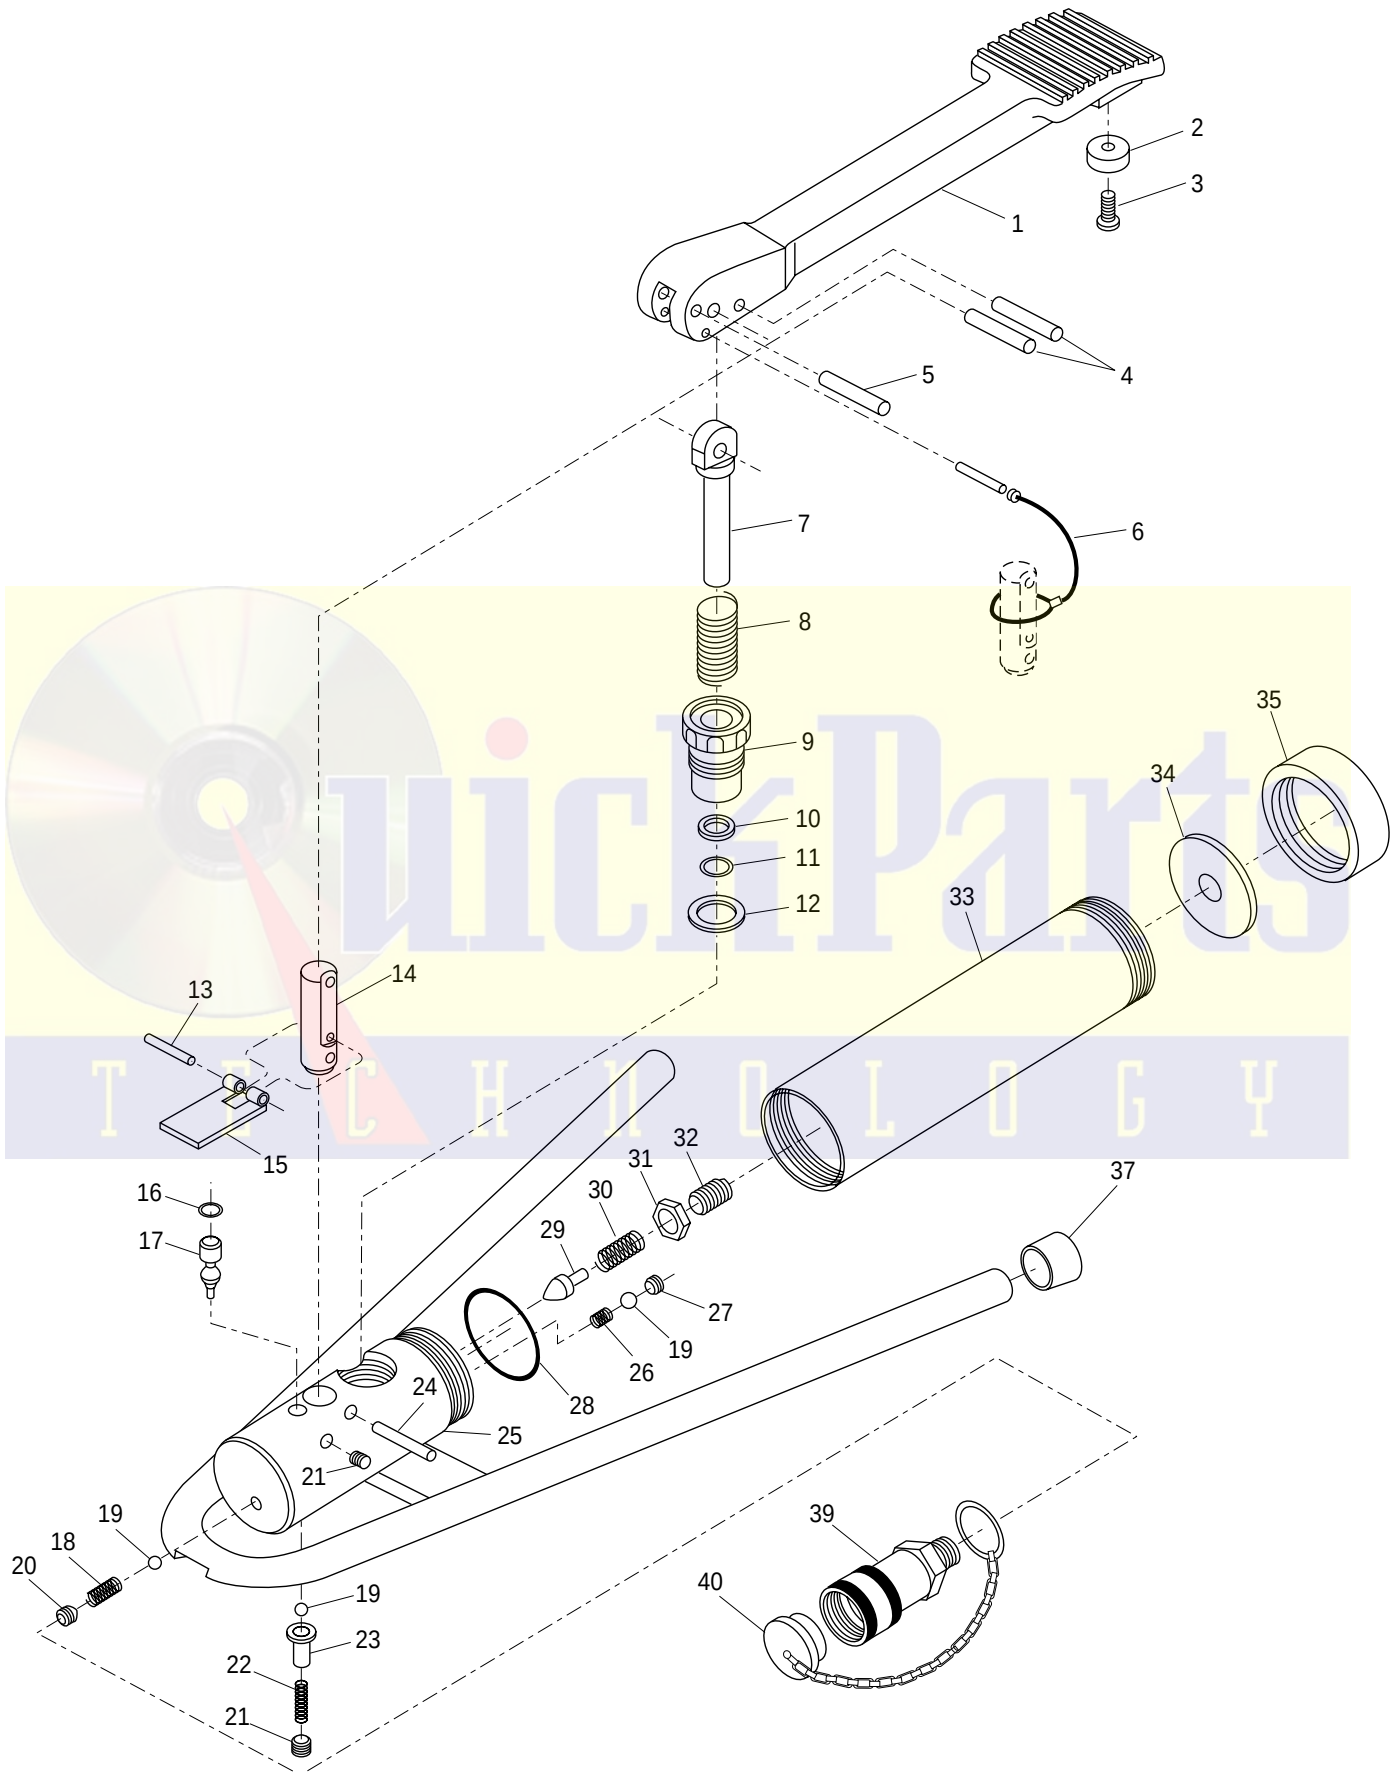

1725 Hydraulic Foot Pump—Parts List

Key	Part No.	Description	Qty
1	502 3872.8	Lever	1
2	905 2728.3	Bumper, Ashland Products Co. No. 7714-E	1
3	905 2726.7	Screw, #8-32 x 3/8" Slotted Pan Head Type-F	1
4	905 0449.6	Pin, Fulcrum and Pivot Plunger Drive Lok Type C 5/16 x 1-1/4"	2
5	905 2740.2	Pin, Lever Stop, 1/4 x 1-1/8 Spiral	1
6	503 1352.5	Pin, Lever Latch	1
7	503 1345.2	Plunger, Hi-Pressure	1
8*	905 3354.2	Spring, Compression Lee #LC-080K-6 Lever Return	1
9	503 1343.6	Nut, Injector Packing	1
10*	905 2575.6	Ring, 7/16 x 9/16 x .056/054 Teflon Spiral Backup	1
11*	905 1215.4	O-Ring, Plunger 7/16 x 9/16 x 1/16 #013-N-674 (replaces 905 4773.0*)	1
12*	503 2537.0	Washer	1
13	905 0700.2	Roll Pin, 3/16 x 1-1/2" Release Pivot	1
14	503 1344.4	Post, Fulcrum	1
15	503 1346.0	Lever Release	1
16*	950 0722.3	O-Ring, Packing 1/8 x 1/4 x 1/16" 006-N-674-7 (replaces 905 4774.8*)	1
17	503 1349.5	Plunger, Release	1
18*	905 3355.0	Spring, Compression Lee #LC-022BC-3 Discharge Check	1
19*	905 0678.2	Ball, 3/16 Grade #25 Chrome Steel	3
20	905 1337.1	Screw, 5/16-24 NF x 5/32" Holo-Krome Socket	1
21	905 0824.6	Plug, 1/16" Unbrako Teflon Coated Level-Seal Soc. Hyd Pipe	2
22*	502 3946.5	Spring, Compression - Release Valve	1
23	502 9420.2	Stop, Ball	1
24	905 0737.1	Pin, Fulcrum - Retaining 1/4 x 1-1/8" Type E Drive-Lok	1
25	503 1387.8	Block, Pump Weldment	1
26*	501 6141.5	Spring, Compression - Intake Check	1
27*	502 5026.4	Plug, Intake Valve Seat	1
28*	905 2381.4	O-Ring, 1-3/4 x 1-5/16 x 3/32 #132-N-219-7 (replaces 905 4772.1*)	1
29	503 0146.2	Pin, Valve	1
30*	501 6606.9	Spring, Compression - Safety Valve	1
31	501 7899.7	Nut, Jam	1
32	502 3876.0	Screw, Valve	1
33	500 3425.1	Tube, Reservoir	1
34*	503 2829.8	Plug, End	1
35	503 2805.0	Cap, End	1
37	905 3340.2	Plug, Pipe-Plastic	2
39	905 4167.7	Coupler, Bruning #SM-251 1/4" NPSF Female	1
	905 1449.1	O-Ring, Coupler (not shown)	1
40	905 4168.5	Plug, Bruning #P-25 Protective	1
	503 3336.4	Repair Kit	

*(includes #8, 10, 11, 12, 16, 18, 19, 22, 26, 27, 28, 30 & 34 as indicated by *)

*Fluorocarbon O-Rings are used at the factory as a part of production process.

GREENLEE **TEXTRON**

Greenlee Textron / Subsidiary of Textron Inc.

4455 Boeing Drive, Rockford, IL 61109-2988 USA

Customer Service (International): 815/397-7070 • Fax: 815/397-1391

Customer Service (North America): 800/435-0786 • Fax: 800/451-2632, 815/397-1865

Canada Fax: 800/524-2853

Printed in the U.S.A.