
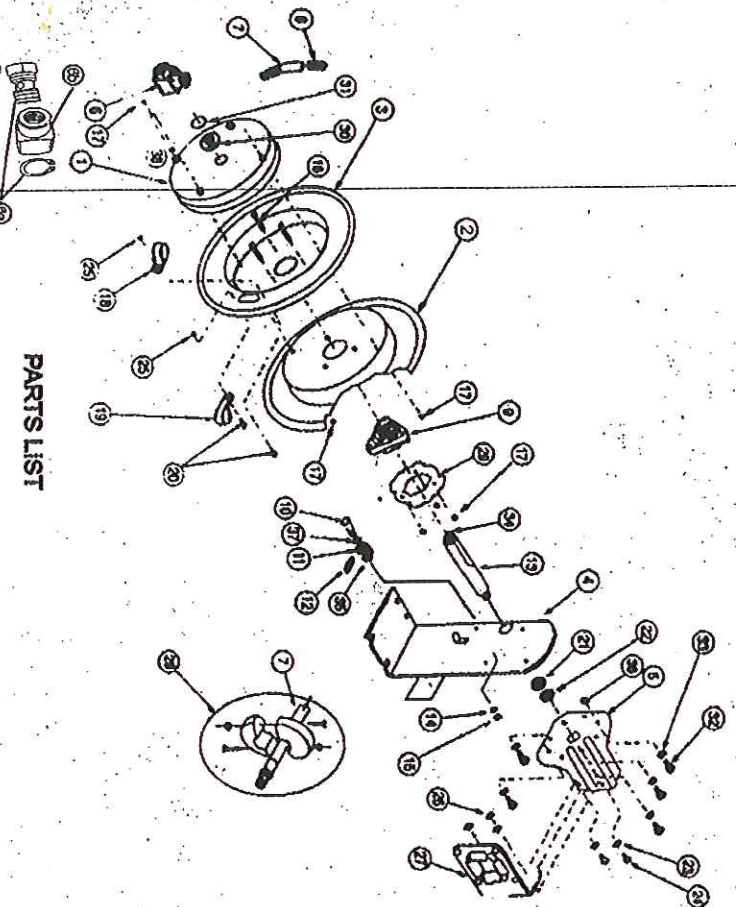


Retractable Air Hose Reel WITH 50' AIR HOSE

OPERATION MANUAL

SAVE THIS BOOK FOR REFERENCE

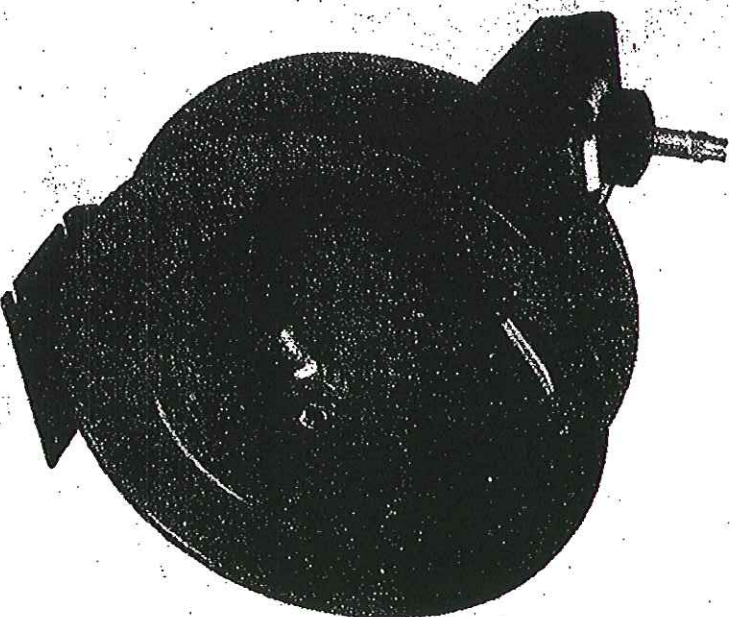

PARTS LIST

- | | |
|---|---|
| 1 Spring Canister (1) | 20 Bolt (2) |
| 2 Drum (air inlet side) (1) | 21 Washer (1) |
| 3 Drum (mounting bracket side) (1) | 22 Nut (1) |
| 4 Mounting Bracket (1) | 23 Washer (3) |
| 5 Guide Arm (1) | 24 Bolt (3) |
| 6a Air Inlet Valve Body (1)
(includes 2-pc. O-rings) | 25 Nut (2) |
| 6b Air Inlet Valve Swivel Collar (1) | 26 Lock Nut (3) |
| 7 Hose (1) | 27 Roller Guide
Bracket Assembly (1) |
| 8 Spring Hose Guard (1) | 28 Hose Stopper Assembly (1) |
| 9 Hub Bearing Assembly (1) | 29 Ratchet Locking Gear (2) |
| 10 Bolt (1) | 30 Spacing Washer (1) |
| 11 Locking Cam (1) | 31 Retaining Ring (1) |
| 12 Spring (1) | 32 Bolt (4) |
| 13 Axle (1) | 33 Lock Washer (4) |
| 14 Lock Washer (1) | 34 Setscrew (1) |
| 15 Nut (1) | 35 Spacing Washer (1) |
| 16 Bolt (3) | 36 Nut (4) |
| 17 Nut (7) | 37 Spacing Washer (1) |
| 18 Clamp (1) | 38 Pin (1) |

Specifications

• Spring driven, automatic rewind, with locking ratchet mechanism (eight locking positions per revolution).

• Brass connectors on hose and reel

• Air Hose Size:

1 / 4" x 50'

• Reel Air Inlet (F):

1 / 4" NPT

• Air Hose Outlet (M):

1 / 4" NPT

• Maximum Pressure: 300PSI

• Maximum Air Flow: 25 CFM