



**CAT5138**

**3/8" RIGHT ANGLE  
GEARLESS IMPACT WRENCH**

## OPERATING MANUAL • WARNING INFORMATION • PARTS LIST



### **! WARNING**

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- lead from lead-based paints,
- crystalline silica from bricks and cement and other masonry products, and
- arsenic and chromium from chemically-treated lumber.

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.

### **SPECIFICATIONS**

Maximum Torque.....	250 ft-lbs
Breakaway Torque.....	415 ft-lbs
Free Speed.....	8,500 RPM
Length.....	9-5/8"
Width.....	2-3/8"
Anvil Tip To Back.....	3-1/2"
Weight.....	2.5 lbs
Maximum Air Pressure.....	.90psig (6.2 bar)
Air Inlet.....	1/4" NPT
Recommended Hose Size.....	3/8" I.D.
Average Air Consumption.....	3.8 CFM

### **! WARNING**



**ALWAYS READ  
INSTRUCTIONS  
BEFORE USING  
POWER TOOLS**



**ALWAYS WEAR  
SAFETY GOGGLES**



**ALWAYS WEAR  
HEARING  
PROTECTION**



**AVOID PROLONGED  
EXPOSURE TO  
VIBRATION**

## FAILURE TO OBSERVE THESE WARNINGS COULD RESULT IN INJURY



**THIS INSTRUCTION MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.**


**READ THIS INSTRUCTION MANUAL CAREFULLY AND UNDERSTAND ALL INFORMATION BEFORE OPERATING THIS TOOL.**

- It is the responsibility of the owner to make sure all personnel read this manual prior to using this air tool. It is also the responsibility of the air tool owner to keep this manual intact and in a convenient location for all to see and read. If the manual or product labels are lost or not legible, contact Cornwell for replacements. If the operator is not fluent in English, the product and safety instructions shall be read to and discussed with the operator in the operator's native language by the purchaser/owner or his designee, making sure that the operator comprehends its contents.
- Always operate, inspect and maintain this tool in accordance with American National Standards Institute Safety Code of Portable Air Tools (ANSI B186.1) and any other applicable safety codes and regulations.
- For safety, top performance and maximum durability of parts, operate this tool at 90 psig: 6.2 bar max air pressure with 3/8" diameter air supply hose.
- Always wear impact-resistant eye protection when operating or performing maintenance on this tool (users and bystanders).
- Always wear hearing protection when using this tool (users and bystanders). High sound levels can cause permanent hearing loss. Use hearing protection as recommended by your employer or OSHA regulation.
- Keep the tool in efficient operating condition.
- Operators and maintenance personnel must be physically able to handle the bulk, weight and power of this tool.
- Keep tool out of reach of children.
- Air under pressure can cause severe injury. Never direct air at yourself or others. Always turn off the air supply, drain hose of air pressure and detach tool from air supply before installing, removing or adjusting any accessory on this tool, or before performing any maintenance on this tool. Failure to do so could result in injury. Whip hoses can cause serious injury. Always check for damaged, frayed or loose hoses and fittings, and replace immediately. Do not use quick detach couplings at tool. See instructions for correct set-up on page 4.
- Air powered tools can vibrate during use. Vibration, repetitive motions or uncomfortable positions over extended periods of time may be harmful to your hands and arms. Discontinue use of tool if discomfort, tingling feeling or pain occurs. Seek medical advice before resuming use.
- Place the tool on the work before starting the tool. Do not point or indulge in any horseplay with this tool.
- Note direction of rotation BEFORE operating this tool.



- Slipping, tripping and/or falling while operating air tools can be a major cause of serious injury or death. Be aware of excess hose left on the walking or work surface.
- Keep body working stance balanced and firm. Do not overreach when operating the tool.
- Anticipate and be alert for sudden changes in motion during start up and operation of any power tool.
- Do not carry tool by the hose. Protect the hose from sharp objects and heat.
- Tool shaft may continue to rotate briefly after throttle is released. Avoid direct contact with accessories during and after use. Gloves will reduce the risk of cuts or burns.
- Keep away from rotating end of tool. Do not wear jewelry or loose clothing. Secure long hair. Scalping can occur if hair is not kept away from tool and accessories. Choking can occur if neckwear is not kept away from tool and accessories.
- Impact wrenches are not torque control devices. Fasteners with specific torque requirements must be checked with suitable torque measuring devices after installation with an impact wrench.
- Do not lubricate tools with flammable or volatile liquids such as kerosene, diesel or jet fuel.
- This tool is not insulated against electric shock.
- This tool must not be used in explosive atmospheres.
- Do not force tool beyond its rated capacity.
- **Use only impact sockets and accessories on this tool. Do not use hand sockets or accessories.**
- **Use accessories recommended by Cornwell Tools.**
- Do not use (or modify) the tool for any other purpose than that for which it was designed without consulting the manufacturer's authorized representative.
- Do not remove any labels. Replace any damaged labels.
- Failure to heed these warnings may result in serious or fatal personal injury and/or property damage.

**WARNING:** This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

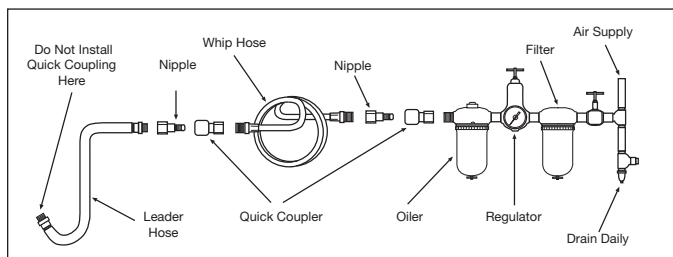

## AIR SUPPLY

Tools operate on a wide range of air pressures. It is recommended that air pressure of these tools measures 90 psig at the tool with the trigger fully depressed and no load applied to the tool. Higher pressure (over 90 psig; 6.2 bar) raises performance beyond the rated capacity of the tool, which will shorten tool life and could cause injury.

Always use clean, dry air. Dust, corrosive fumes and/or water in the air line will cause damage to the tool. Drain water from air lines and compressor prior to running tool. Clean the air inlet filter screen weekly. The recommended hookup procedure can be viewed in the above figure.

The air inlet used for connecting air supply has standard 1/4" NPT. Line pressure should be increased to compensate for unusually long air hoses (over 25 feet). Minimum hose diameter should be 3/8" I.D. and fittings should have the same inside dimensions and be tightly secured.

Ensure an accessible emergency shut off valve has been installed in the air supply line and make others aware of its location.

## LUBRICATION

Lubricate the air motor daily with high quality air tool oil. If no air line oiler is used, run 1/2 oz. of oil through the tool. The oil can be squirted into the tool air inlet or into the hose at the nearest connection to the air supply, then run the tool. A rust inhibitive oil is acceptable for air tools.

**WARNING:** After an air tool has been lubricated, oil will discharge through the exhaust port during the first few seconds of operation. The exhaust port must be covered with a towel before applying air pressure to prevent serious injury.

## OPERATION

This tool is an impacting tool and not a torque meter. When specific torque is required, it must be checked with a torque meter after fitting the fastener with the impact. This impact wrench is rated at 3/8" SAE bolt size. Rating must be downgraded for spring U bolts, tie bolts, long cap screws, double depth nuts, badly rusted conditions and spring fastener, as they absorb much of the impact power. When possible, clamp or wedge the bolt to prevent spring back.

Soak rusted nuts in penetrating oil and break rust seal before removing with impact wrench. If nut does not start to move in three to five seconds, use a larger size impact wrench. Do not use impact wrench beyond rated capacity as this will drastically reduce tool life.

The reversing valve is used to change the direction of the tool. When the valve is out, the tool is in forward or right hand direction. When the valve is pushed in, the tool is in reverse or left hand direction.

**NOTE:** Always turn off the air supply, drain hose of air pressure and detach tool from air supply before installing, removing or adjusting any accessory on this tool, or before performing any maintenance on this tool.

**NOTE:** Actual torque on a fastener is directly related to joint hardness, tool speed, condition of socket and the time the tool is allowed to impact. Use the simplest possible tool to socket hook up. Every condition absorbs energy and reduces power.

**NOTE:** During operation, safety goggles must always be worn to guard against flying debris (users and bystanders).

## TROUBLESHOOTING

Other factors outside the tool may cause loss of power or erratic action. Reduced compressor output, excessive drain on the air line, moisture or restrictions in air pipes or the use of hose connections of improper size or poor conditions may reduce air supply. Grit or gum deposits in the tool may cut power and may be corrected by cleaning the air strainer and flushing out the tool with gum solvent oil or an equal mixture of SAE #10 and kerosene. If outside conditions are in order, disconnect tool from hose and take tool to your nearest authorized service center.



**CAT5138**

## 3/8" RIGHT ANGLE GEARLESS IMPACT WRENCH

---

### WARRANTY COVERAGE

Cornwell Quality Tools Company ("Cornwell") warrants this product against defects in material and workmanship for a period of TWO (2) YEARS from the date of original retail purchase. Subject to the conditions and limitations set forth below, Cornwell will, at its option, either repair or replace any part of the product(s) that proves defective by reason of improper workmanship or materials.

This warranty does not cover any damage to this product that results from accident, abuse, misuse, natural or personal disaster, or any unauthorized disassembly, repair, or modification. Repairs, disassembly and modification are only authorized to be made by Cornwell or a Cornwell Authorized Warranty Center.

### WARRANTY SERVICE

In order to have your tool repaired, return the tool to any Cornwell Authorized Warranty Center, freight prepaid. Please include a copy of your proof of purchase and a brief description of the problem. The tool will be inspected and if any part or parts are found to be defective in material or workmanship, they will be repaired free of charge, and the repaired tool will be returned to you freight prepaid.

### EXCLUSIONS AND LIMITATIONS

THIS WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. CORNWELL SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, TO THE EXTENT PERMITTED BY APPLICABLE LAW, ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF CORNWELL CANNOT LAWFULLY DISCLAIM IMPLIED WARRANTIES UNDER THIS LIMITED WARRANTY, ALL SUCH IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.

IN NO EVENT SHALL CORNWELL BE LIABLE TO THE PURCHASER OR TO THE USER OF A CORNWELL PRODUCT FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES BASED UPON BREACH OF WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, TORT, OR ANY OTHER LEGAL THEORY. SUCH DAMAGES INCLUDE, WITHOUT LIMITATION, EXPENSES, LOST REVENUES, LOST SAVINGS, LOST PROFITS, OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE PURCHASE, USE OR INABILITY TO USE THE CORNWELL PRODUCT.


Some states do not allow the exclusion or limitation of incidental or consequential damages or exclusions or limitation on the duration of implied warranties or conditions, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary by state.

Repair kits and replacement parts are available for many Cornwell products, regardless of whether or not the product is still covered by a warranty plan.

Cornwell Quality Tools Company  
667 Seville Road • Wadsworth, OH 44281-1094

**-Save these instructions-**

## PARTS LIST

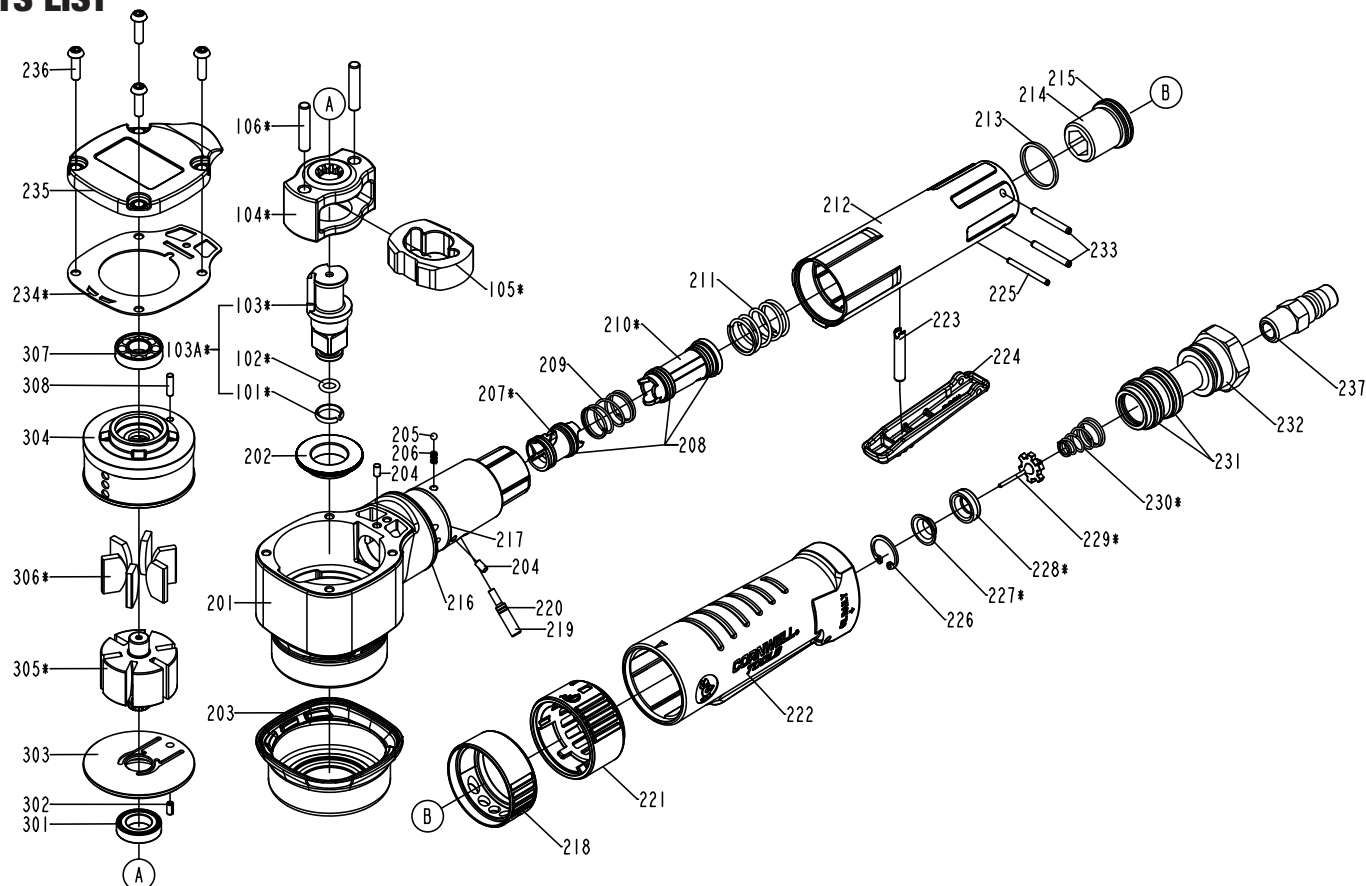

Item	Part No	Parts Name	Qty
101	RS1734201	SOCKET RETAINER (Incl. w/#103A)	1
102	RS513803	O-RING (Incl. w/#103A)	1
103	RS513804	ANVIL	1
103A	RS513805	ANVIL ASSEMBLY (Incl. #101, 102 and 103)	1
104	RS14004	HAMMER FRAME	1
105	RS14005	HAMMER	1
106	RS14006	HAMMER PIN	2
201	RS513801C	HOUSING	1
202	RS2138106	HAMMER CASE BUSHING	1
203	RS14008	PROTECTOR	1
204	RS12333	PIN	2
205	RS1734416	STEEL BALL (3mm)	1
206	RS7500220	POSITIONING SPRING	1
207	RS14009	REVERSE VALVE	1
208	RS14010	O-RING	3
209	RS14011	SPRING	1
210	RS14012	SWITCH COLLAR	1
211	RS14013	SPRING	1
212	RS14014	HANDLE	1
213	RS14015	FLAT WASHER	1
214	RS14016	SPECIAL SCREW	1
215	RS14017	O-RING	1
216	RS14018	O-RING	1
217	RS2638315	O-RING	1
218	RS14019	OUTLET CONTROLLER UNIT	1
219	RS14020	LEVER	1

Item	Part No	Parts Name	Qty
220	RS1735413	O-RING	1
221	RS14021	REVERSE RING	1
222	RS513802C	HANDLE GRIP	1
223	RS2638111	VALVE STEM	1
224	RS5000HD103	THROTTLE LEVER	1
225	RS14023	SPIRAL PINS	1
226	RS0260404	C-RING	1
227	RS0260405	SEAL BUSHING	1
228	RS0260406	SEAL	1
229	RS0260407	TIP VALVE	1
230	RS1735406	SPRING	1
231	RS14024	O-RING	2
232	RS14025	AIR INLET	1
233	RS14026	SPIRAL PINS	2
234	RS14027	PACKING	1
235	RS14028	REAR COVER	1
236	RS14029	HALF ROUND HD. STAR HEAD BOLT	4
301	RS14030	BEARING	1
302	RS76630	SPRING PIN	1
303	RS14031	FRONT BEARING PLATE	1
304	RS14032	CYINDER	1
305	RS14033	ROTOR	1
306	RS14034	ROTOR BLADES	6
307	RS12327	BEARING	1
308	RS14035	PIN	1
not shown	RSCAT5138WL	Product Label	1