



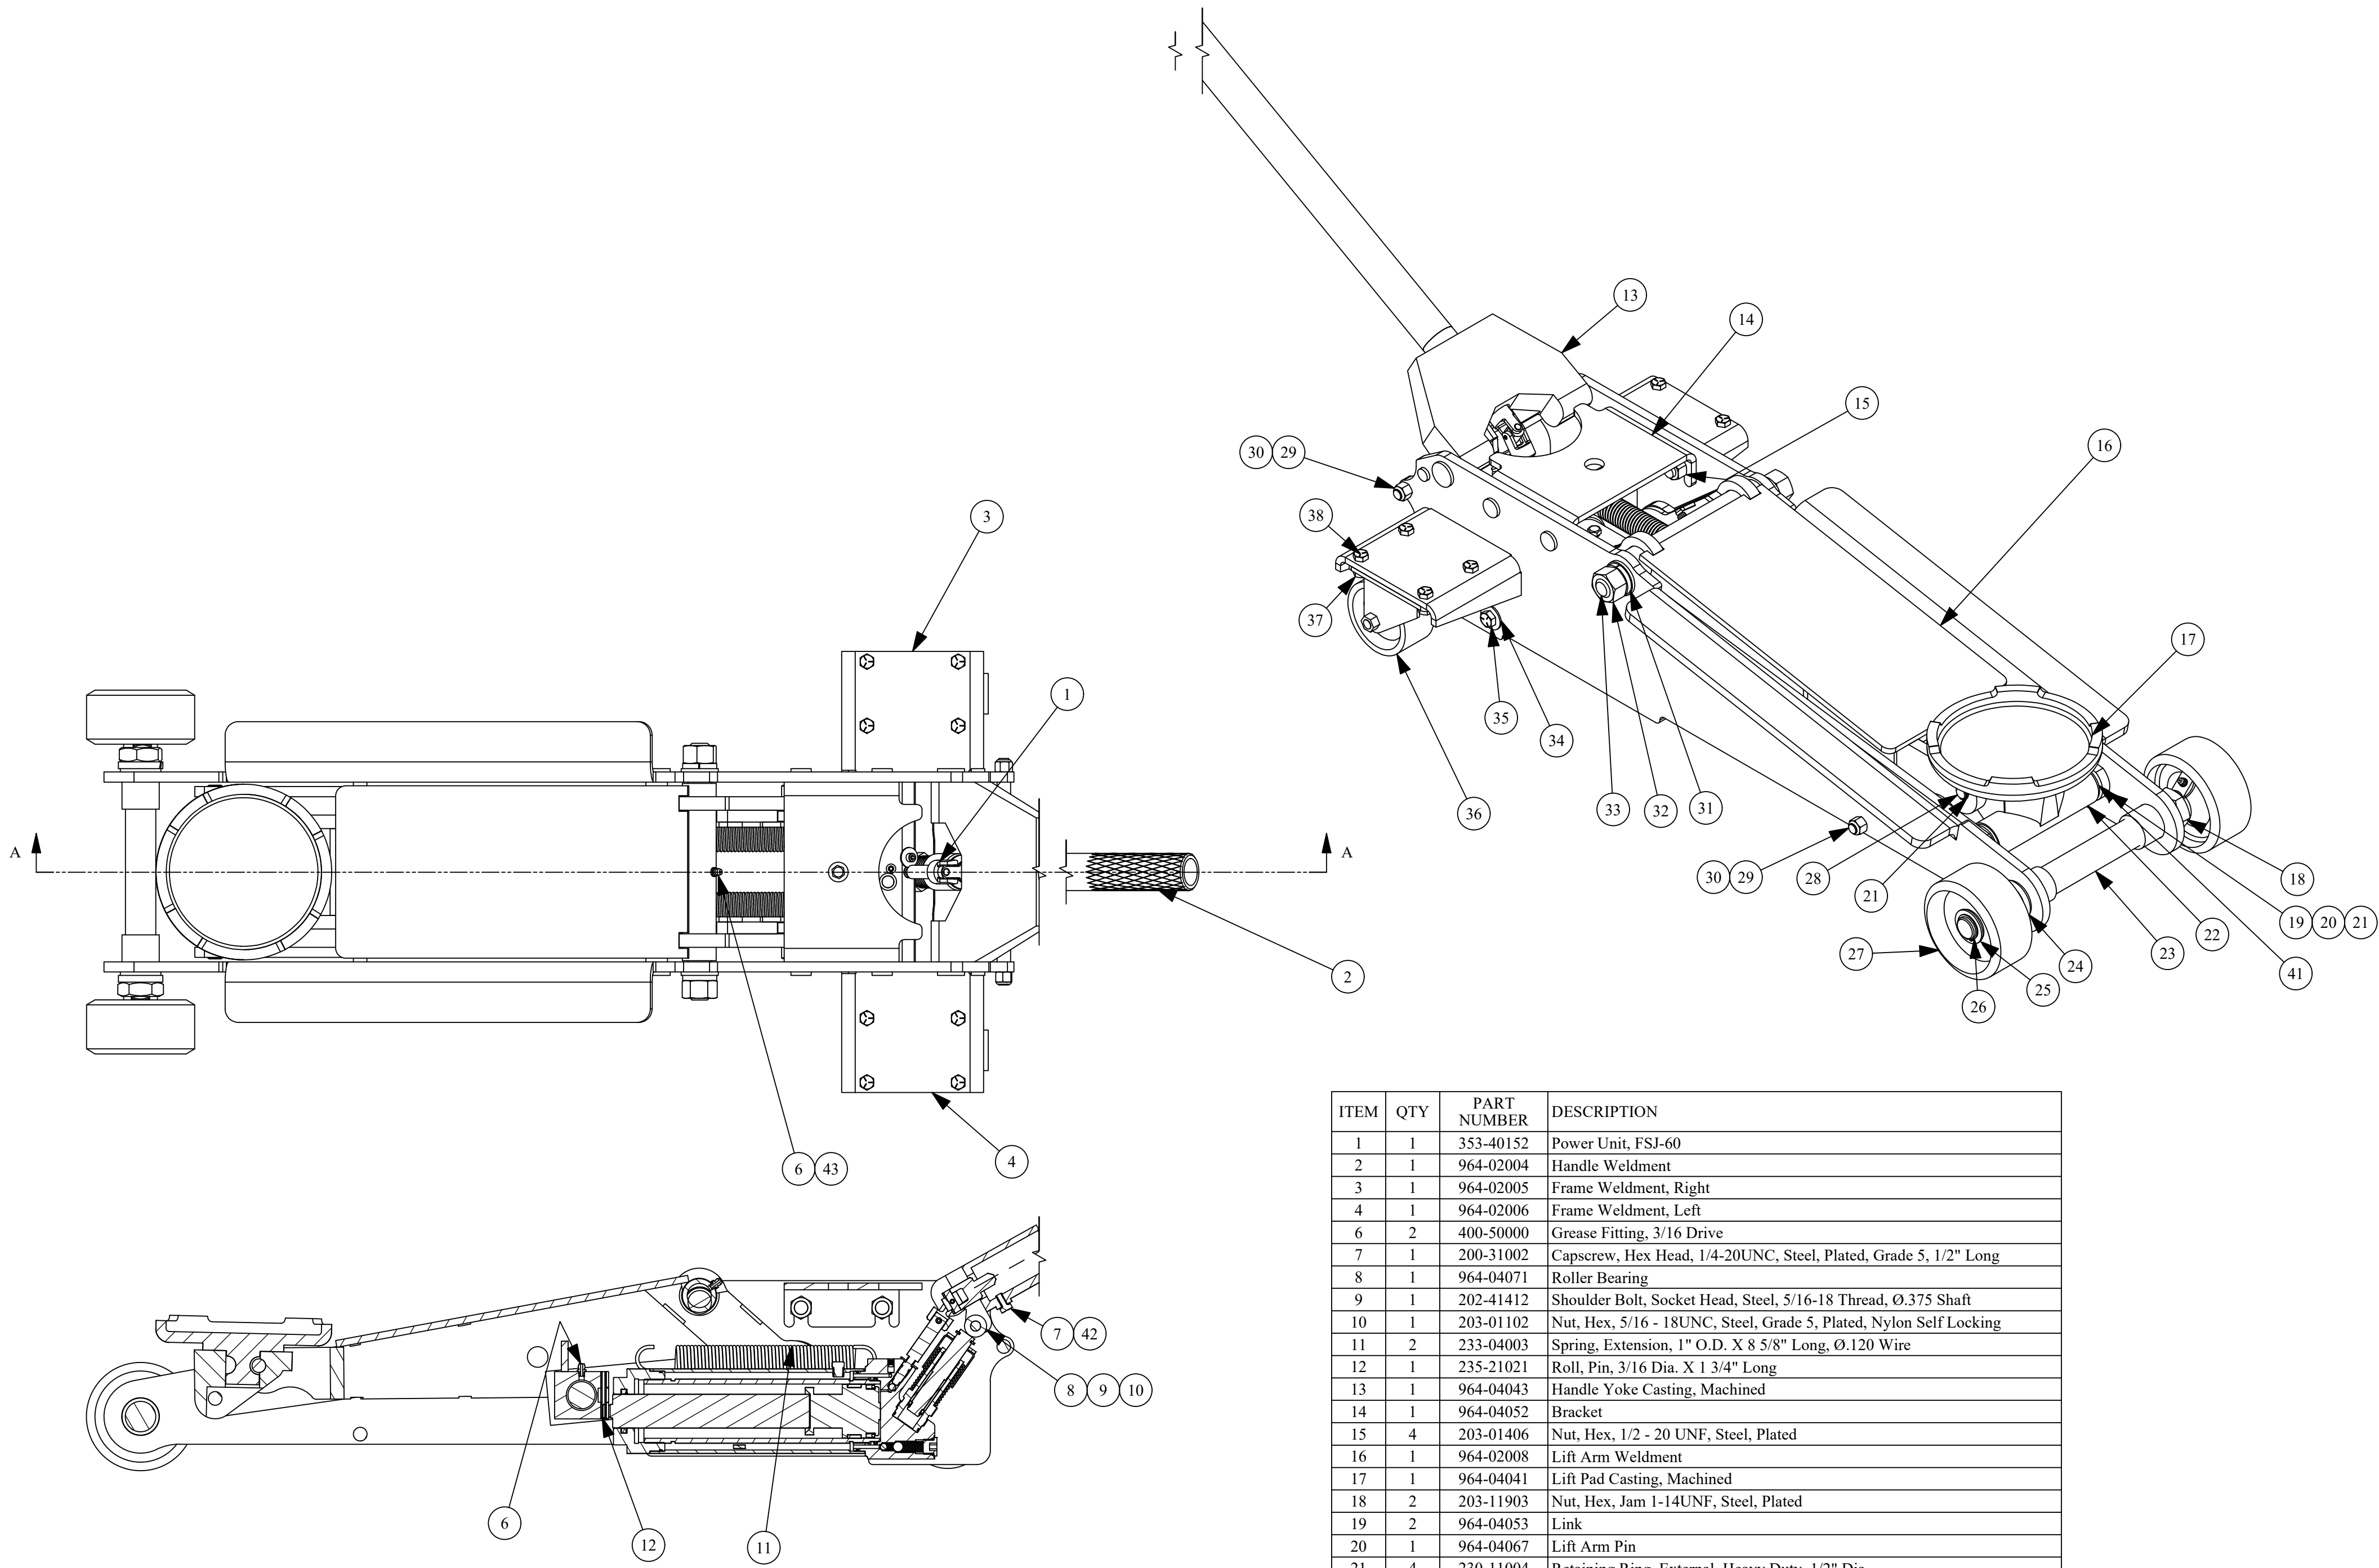

SECTION A-A
SCALE 1:4

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	353-40152	Power Unit, FSJ-60
2	1	964-02004	Handle Weldment
3	1	964-02005	Frame Weldment, Right
4	1	964-02006	Frame Weldment, Left
6	2	400-50000	Grease Fitting, 3/16 Drive
7	1	200-31002	Capscrew, Hex Head, 1/4-20UNC, Steel, Plated, Grade 5, 1/2" Long
8	1	964-04071	Roller Bearing
9	1	202-41412	Shoulder Bolt, Socket Head, Steel, 5/16-18 Thread, Ø.375 Shaft
10	1	203-01102	Nut, Hex, 5/16 - 18UNC, Steel, Grade 5, Plated, Nylon Self Locking
11	2	233-04003	Spring, Extension, 1" O.D. X 8 5/8" Long, Ø.120 Wire
12	1	235-21021	Roll, Pin, 3/16 Dia. X 1 3/4" Long
13	1	964-04043	Handle Yoke Casting, Machined
14	1	964-04052	Bracket
15	4	203-01406	Nut, Hex, 1/2 - 20 UNF, Steel, Plated
16	1	964-02008	Lift Arm Weldment
17	1	964-04041	Lift Pad Casting, Machined
18	2	203-11903	Nut, Hex, Jam 1-14UNF, Steel, Plated
19	2	964-04053	Link
20	1	964-04067	Lift Arm Pin
21	4	230-11004	Retaining Ring, External, Heavy Duty, 1/2" Dia.
22	1	964-04042	Lift Pad Mount, Machined
23	1	964-04069	Axle
24	2	204-11901	Washer, Lock, Split Type, 1", Med., Steel, Unplated
25	2	204-01804	Washer, Special, 1 3/8 O.D. X 7/8 I.D.
26	2	230-13002	Retaining Ring, External, 7/8" Dia.
27	2	480-00016	Wheel & Grease Fitting Subassembly
28	1	964-04066	Lift Pad Pin
29	4	203-01202	Nut, Hex, 3/8 - 16UNC, Steel, Plated, Grade 5, Nylon Self Locking
30	2	964-04065	Frame Spacer
31	2	204-11700	Washer, Lock, Split Type, 3/4, Medium, Steel, Plated
32	2	203-01701	Nut, Hex, 3/4 - 10UNC, Regular, Steel, Plated
33	1	964-04070	Pivot Bolt
34	4	204-01200	Washer, Flat, 3/8 , Type B, Plated
35	4	202-01217	Capscrew, Hex Hd, 3/8 - 24UNF, Steel, Grade 5, Plated, 1" Lg
36	2	480-11042	Caster, Swivel, Plate, 3" Dia. Glass Filled Nylon Wheel
37	8	203-01101	Nut, Hex, 5/16 - 18UNC, Regular, Steel, Plated
38	8	200-31104	Capscrew, Hex Head, 5/16 - 18UNC, Steel, Grade 5, Plated, 3/4" Long
41	2	204-01403	Washer, Flat, 1/2, Type A, Wide, Steel, Plated
42	1	204-01011	Washer, 5/16" X 7/16" X .032" Thick, Steel
43	1	204-10804	Washer, Lock, Split Type, #10, Std, Pl

- Notes:
- 1. Torque Item 6 to 600 Ft-Lbs
 - 2. Torque Item 3 to 600 Ft-Lbs
 - 3. Apply Telfon Paste to Item 27
 - 4. Appy White Lithium Grease on Items 2, & 17.
 - 5. Apply Removable Loctite on Items 3, 6, 10 & 17.
 - 6. Hydraulic oil.: 16 oz.

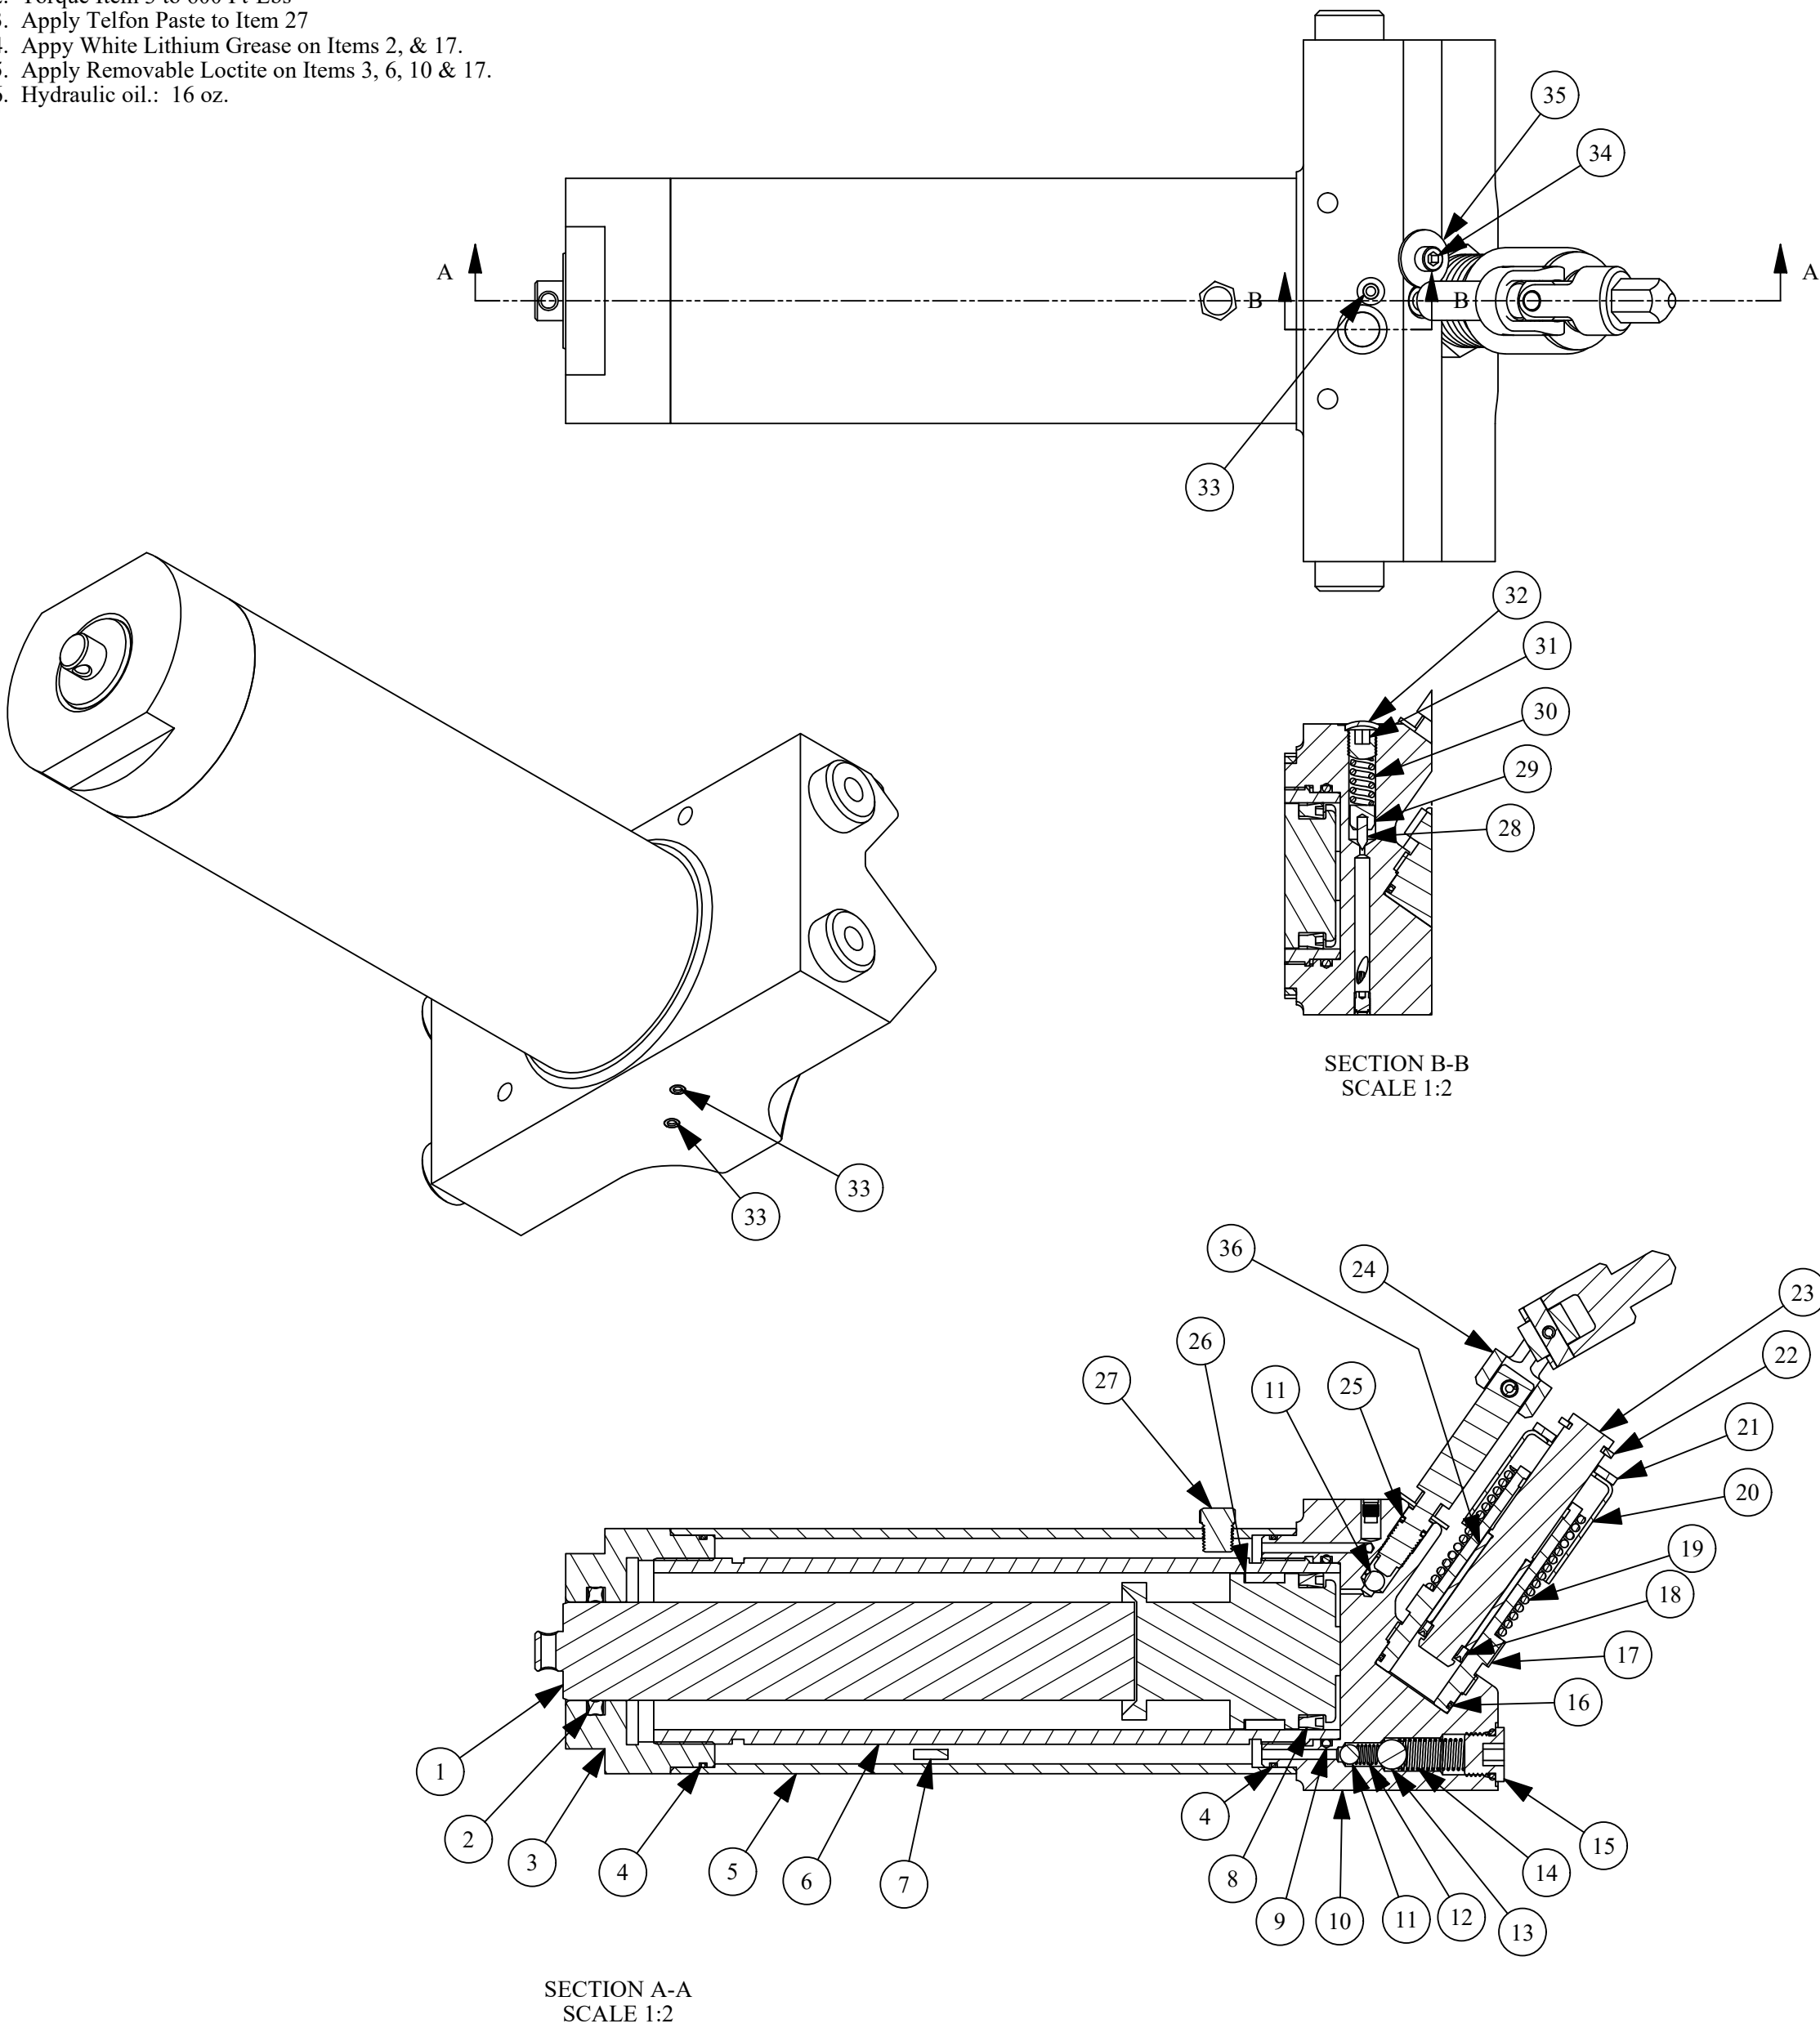

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	353-44044	Piston Rod Weldment
2	1	390-01071	Quad Seal, 1 1/4 I.D. X 1 5/8" O.D. X 3/16 CS
3	1	353-43066	Cap
4	2	390-01005	O'Ring, 2 7/8 O.D. X 2 3/4 I.D., ARP 568-039
5	1	353-41095	Reservoir
6	1	353-41096	Cylinder
7	1	353-49010	Magnet, 1/8 Dia., X 7/16 Long
8	1	390-11152	Seal, 2" O.D. X 1 5/8" I.D. X 3/8
9	1	390-01070	O'Ring, 2-7/16 OD x 2-1/4 ID x 3/32, 70 Duro
10	1	353-49409	Hydraulic Block Casting, Machined
11	2	236-00005	Ball, 1/4 Dia., 440 C Stainless Steel, Gr 25, 58-62 RC
12	1	233-10007	Spring, Compression, .250 O.D. X .406
13	1	236-00006	Ball, 3/8 Dia., 440 C Stainless Steel, Gr 25, 58-62 RC
14	1	233-12002	Compression Spring .406 Dia.
15	1	274-34001	Plug, Straight Thread, Recessed Hex, With O'Ring
16	1	390-01006	O'Ring, 1 1/8 O.D. X 1 I.D.
17	1	353-49412	Plunger housing
18	1	390-10009	Seal, 7/16 X 11/16 X 3/16
19	1	233-15013	Spring, Compression, 1.225 O.D. X 5" Long, 9 Lbs/In
20	1	964-04044	Spring Cage
21	1	204-01614	Washer, Plain, 5/8 Type - B, Plated, 1 1/4 O.D., Narrow Rim
22	1	964-04085	Retaining Ring, Ext, 5/8 Dia.
23	1	353-49411	Plunger
24	1	964-01003	Release Stem Assembly
25	1	390-00002	O'ring, 3/8 O.D. X 1/4 I.D. X 1/16, ARP-010, 70 Duro, Buna-N
26	1	390-11153	Wear Ring, 2.000" OD X 1.750" ID X .500", Butt Cut
27	1	275-20009	Pipe Plug, 1/8 External Hex
28	1	353-49056	Rod, Tapered Release
29	1	353-49057	Release Guide
30	1	233-11007	Compression Spring, .312 O.D. Ground
31	1	201-31202	Set Screw, Steel, 3/8-24 UNF X 3/8 Long, Hex Socket Head, Oval Point
32	1	353-49089	Expansion Plug, 7/16 Dia.
33	3	230-40003	Hole Plug, 5 mm Dia., Pull Type
34	1	201-00821	Capscrew, Socket Head, #10-32UNF, Steel, Grade 8, .500" Long
35	1	204-00807	Washer, Special, .197 I.D. X .745 O.D. X .050 Thick
36	1	353-49413	Sleeve