
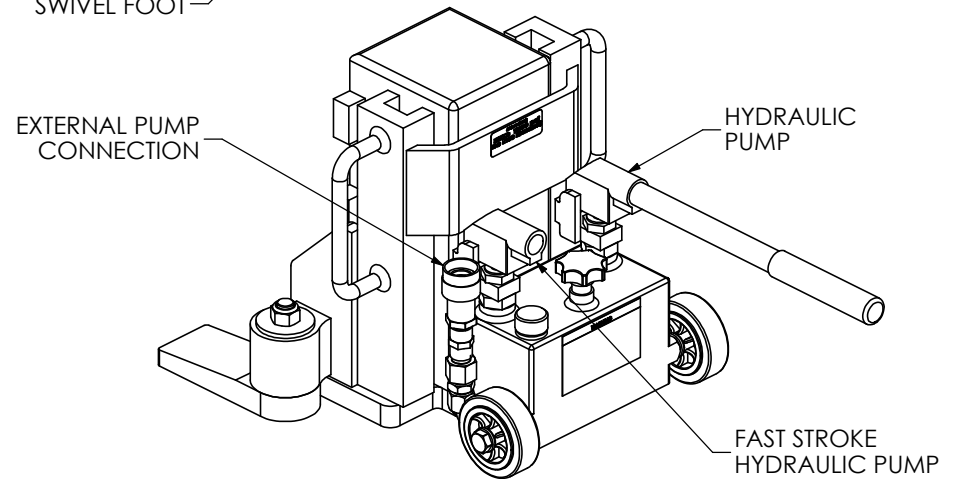



NOTE:

1. DIMENSIONS ARE INCHES [MILLIMETERS] AND SUBJECT TO FABRICATION TOLERANCES
2. WORKING PRESSURE: 7540 psi / 520 bar
3. CAPACITY: 25 METRIC TONS
4. OIL CAPACITY:
 - CYLINDER: 715 mL
 - RESERVOIR: FILL TO 1050 mL
5. ADJUSTABILITY: 3 x 3.9 in / 3 x 100 mm
6. STROKE: 5.5 in / 140 mm

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HILMAN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HILMAN INCORPORATED IS PROHIBITED.

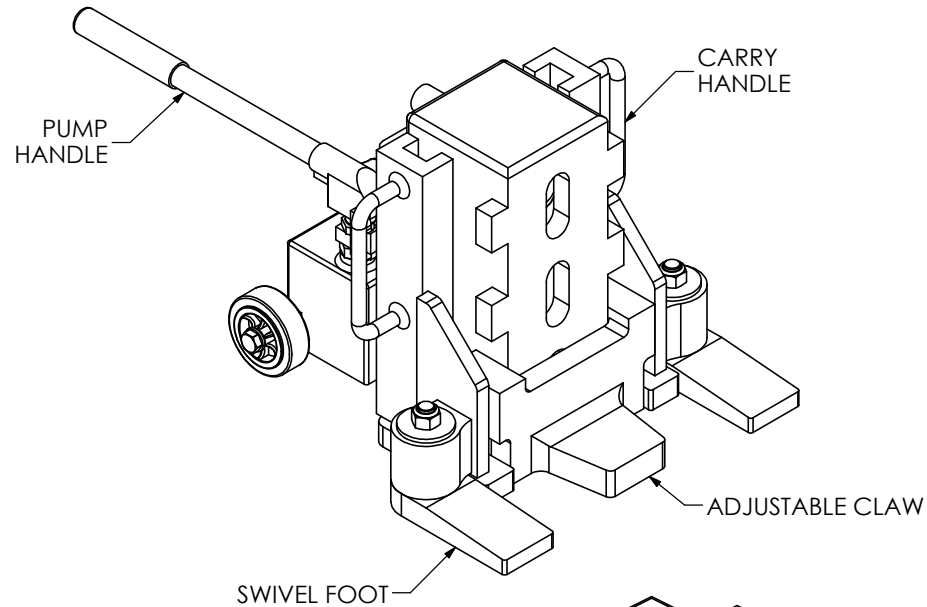

<div>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/8$ ANGULAR: $\pm 5^\circ$ ONE PLACE DECIMAL: $\pm .03$ TWO PLACE DECIMAL: $\pm .015$ THREE PLACE DECIMAL: $\pm .005$</div>		NAME	DATE	<div>HILMAN INC. 12 TIMBER LANE, MARLBORO, NJ 07746 USA</div>		
	DRAWN	SS	07/25/2013	<div>25 TON HYDRAULIC TOE JACK HILMAN INCORPORATED</div>		
	CHECKED	GN	08/05/2013			
	ENG APPR.	DF	08/05/2013			
THIRD ANGLE PROJECTION	COMMENTS:			<div>SIZE A DWG. NO. HTJ-25D REV.</div>		
				<div>SCALE: 1:7 WEIGHT: 159 lb / 72 kg SHEET 1 OF 1</div>		