


YAT714A

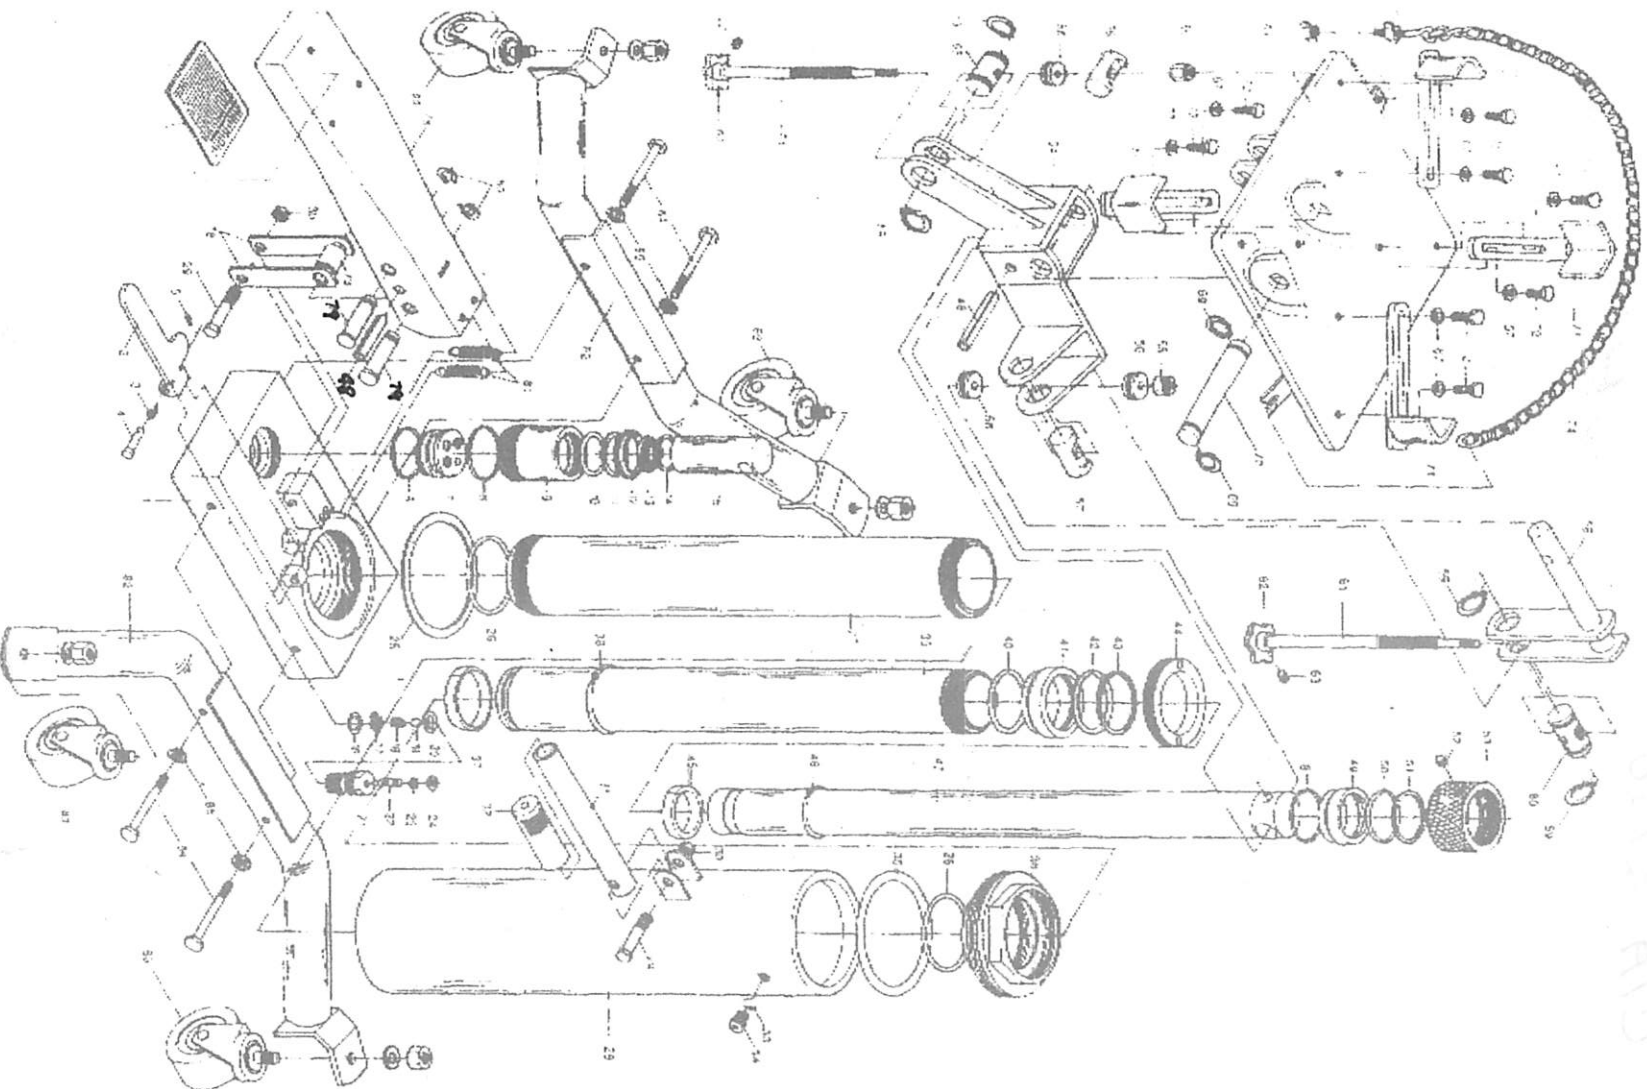

1. HOUSING 1
2. REFLEX FOOT 1
3. SPRING 1
4. BOLT 1
5. PIN (R TYPE) 1
6. O-RING 1
7. CHECK VALVE SET 1
8. O-RING 3
9. PISTON BARREL 1
10. O-RING 1
11. BACK-UP RING 1
12. CLEARING SEAL 1
13. CUP SEAL 1
14. BACK-UP RING 1
15. PISTON 1
16. O-RING 1
17. SPACER 1
18. SPRING 1
19. STEEL BALL 1
20. O-RING 1
21. VALVE 1
22. VALVE PIN 1
23. O-RING 1
24. SNAP RING E 1
25. WASHER 1
26. INNER TUBE SEAL 2
27. INNER TUBE 1
28. OUTER TUBE 1
29. HEX HEAD BOLT 2
30. HEX HEAD NUT 2
31. HANDLE 1
32. GRIP 1
33. O-RING 1
34. OIL PLUNGER 1
35. END CAP SEAL 1
36. END CAP 1
37. RUBBING BUSHING 1
38. C CLIP 1
39. CORE TUBE 1
40. COPPER BUSHING SEAL 1
41. COPPER BUSHING 1
42. O-RING 1
43. BACK-UP RING 1
44. COUPLING 1
45. RUBBING BUSHING SEAL 1
46. C CLIP 1
47. INNER BEARING 1
48. HOLLOW PIN 2
49. COPPER BUSHING 1
50. O-RING 1
51. BACK UP RING 1
52. SCREW 1
53. UPPER LOCK 1
54. BRACKET BASE ST 1
55. HEX NUT 2
56. T SYSTEM BEARING 3
57. ADJUST BEARING B-1 1
58. BRACKET PIN SET 1
59. C CLIP 4
60. ADJUST BEARING B-2 1
61. ADJUST BEARING B 1
62. ADJUST BEARING HANDLE 2
63. HEX HEAD BOLT 2
64. ADJUST BEARING A 1
65. ADJUST BEARING A-2 1
66. ADJUST BEARING A-1 1
67. FLAT WASHER 8
68. BRACKET SET 1
69. C CLIP 2
70. BRACKET PIN 1
71. SADDLE ANGLE 4
72. 3/8" UNC-3/4" L HEX HEAD BO
73. PEDAL RUBBER 1
74. CHAIN & HOOK 1
75. WING NUT 2
76. PEDAL 1
77. PEDAL RUBBER GASKET
78. PEDAL FIX PLATE 2
79. PEDAL AXLE 2
80. C CLIP 2
81. PEDAL SPRING 2
82. LEGS ASSY 2
83. WHEELS 4
84. HEX HEAD BOLT 4
85. SPRING WASHER 4

TRI-CITY HYDRAULIC JACK SERVICE

4828 N. Florida Avenue
Tampa, Florida 33603-8700
(813) 236-8551




March 12, 2001

ORDER: YA714A

**Value
Priced**

Blue-Point[®] **1/2 Ton Capacity** **Hydraulic High Lift** **Transmission Jack**

**Two stage hydraulic
ram provides high rise**
**Handles all passenger
car automatic
transmission
&
front wheel drive
transaxles**
**Handles air-cooled VW
engines**

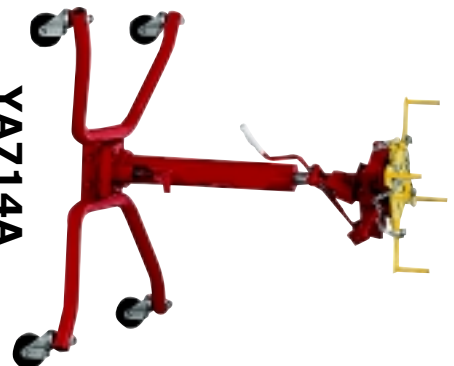

Features

- Four (4) adjustable load support arms fit all transmission pan flanges
- Aligns spines and bolt holes
Adjustable to 0.030 of an inch or less
- Foot operated pump and release leaves operator's hands free
- Wide base provides stability; four (4) full swivel ball bearing casters enhance mobility

Specifications:

Capacity	1/2 tons
Low Height	38.00"
High Lift Point	76.50"
Lifting Head Size	15.50" x 15.50"
Chassis Length	38.00"
Chassis Width	38.00"
Forward Tilt	80°
Rearward Tilt	18°
Sideways Tilt	10° L&R



WARNING

- Wear safety goggles.
(User & bystanders)
- Do not work on vehicles
supported by jack; use jack stand.
capacity of jack.
- Use jacks on hard, strong, & level
surfaces.
- Read & follow instruction manual.



new product

Snap-on