


OPERATION, SERVICE AND PARTS INSTRUCTION MANUAL





767

HAND PUMP


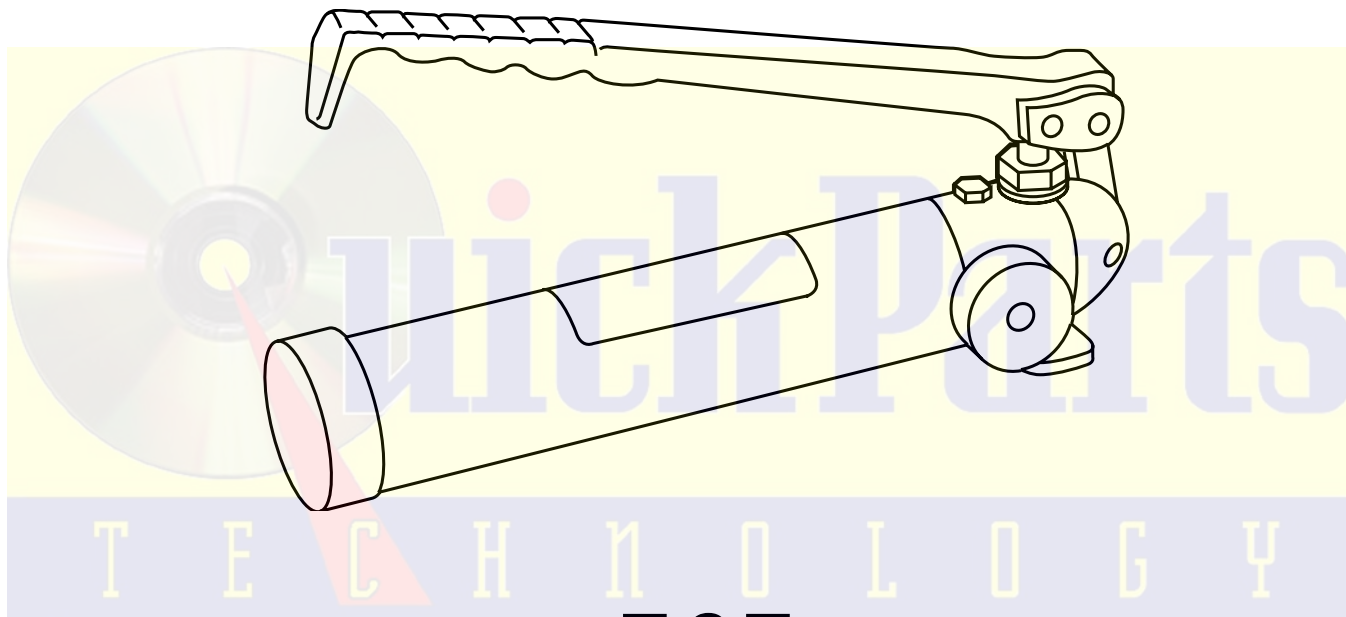


Read and **understand** this material before operating or servicing this equipment. Failure to understand how to safely operate this tool could result in an accident causing serious injury or death. This device should only be operated by qualified personnel.

Exploded View

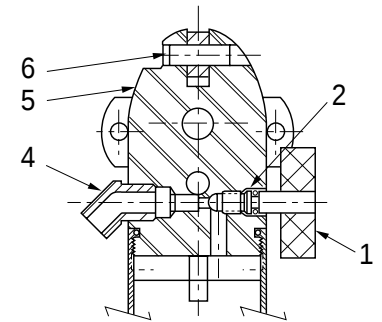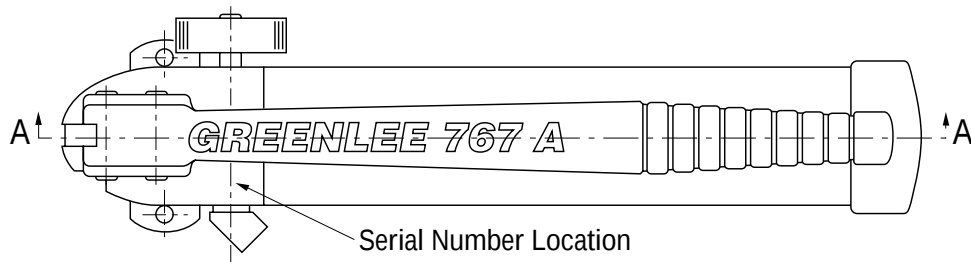


SECTION B-B

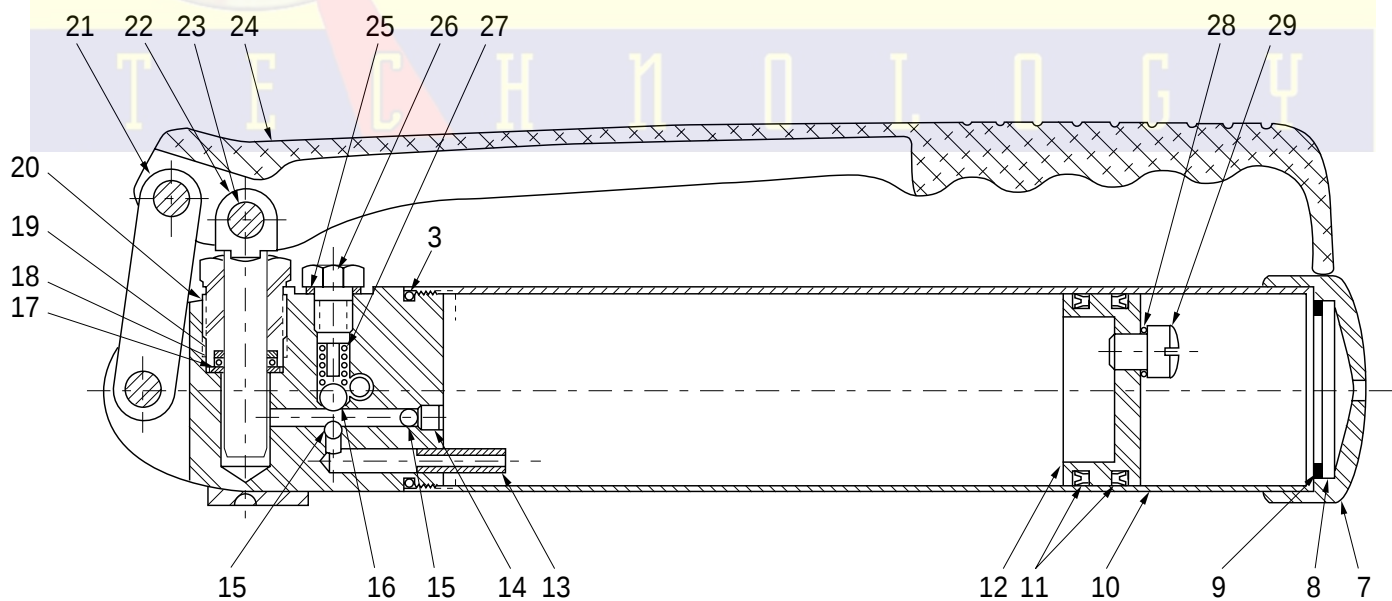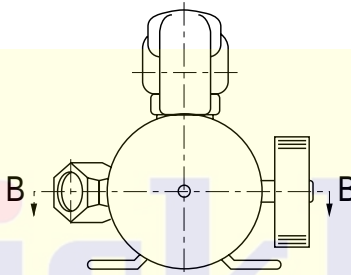

SECTION A-A

Pump Block Seat

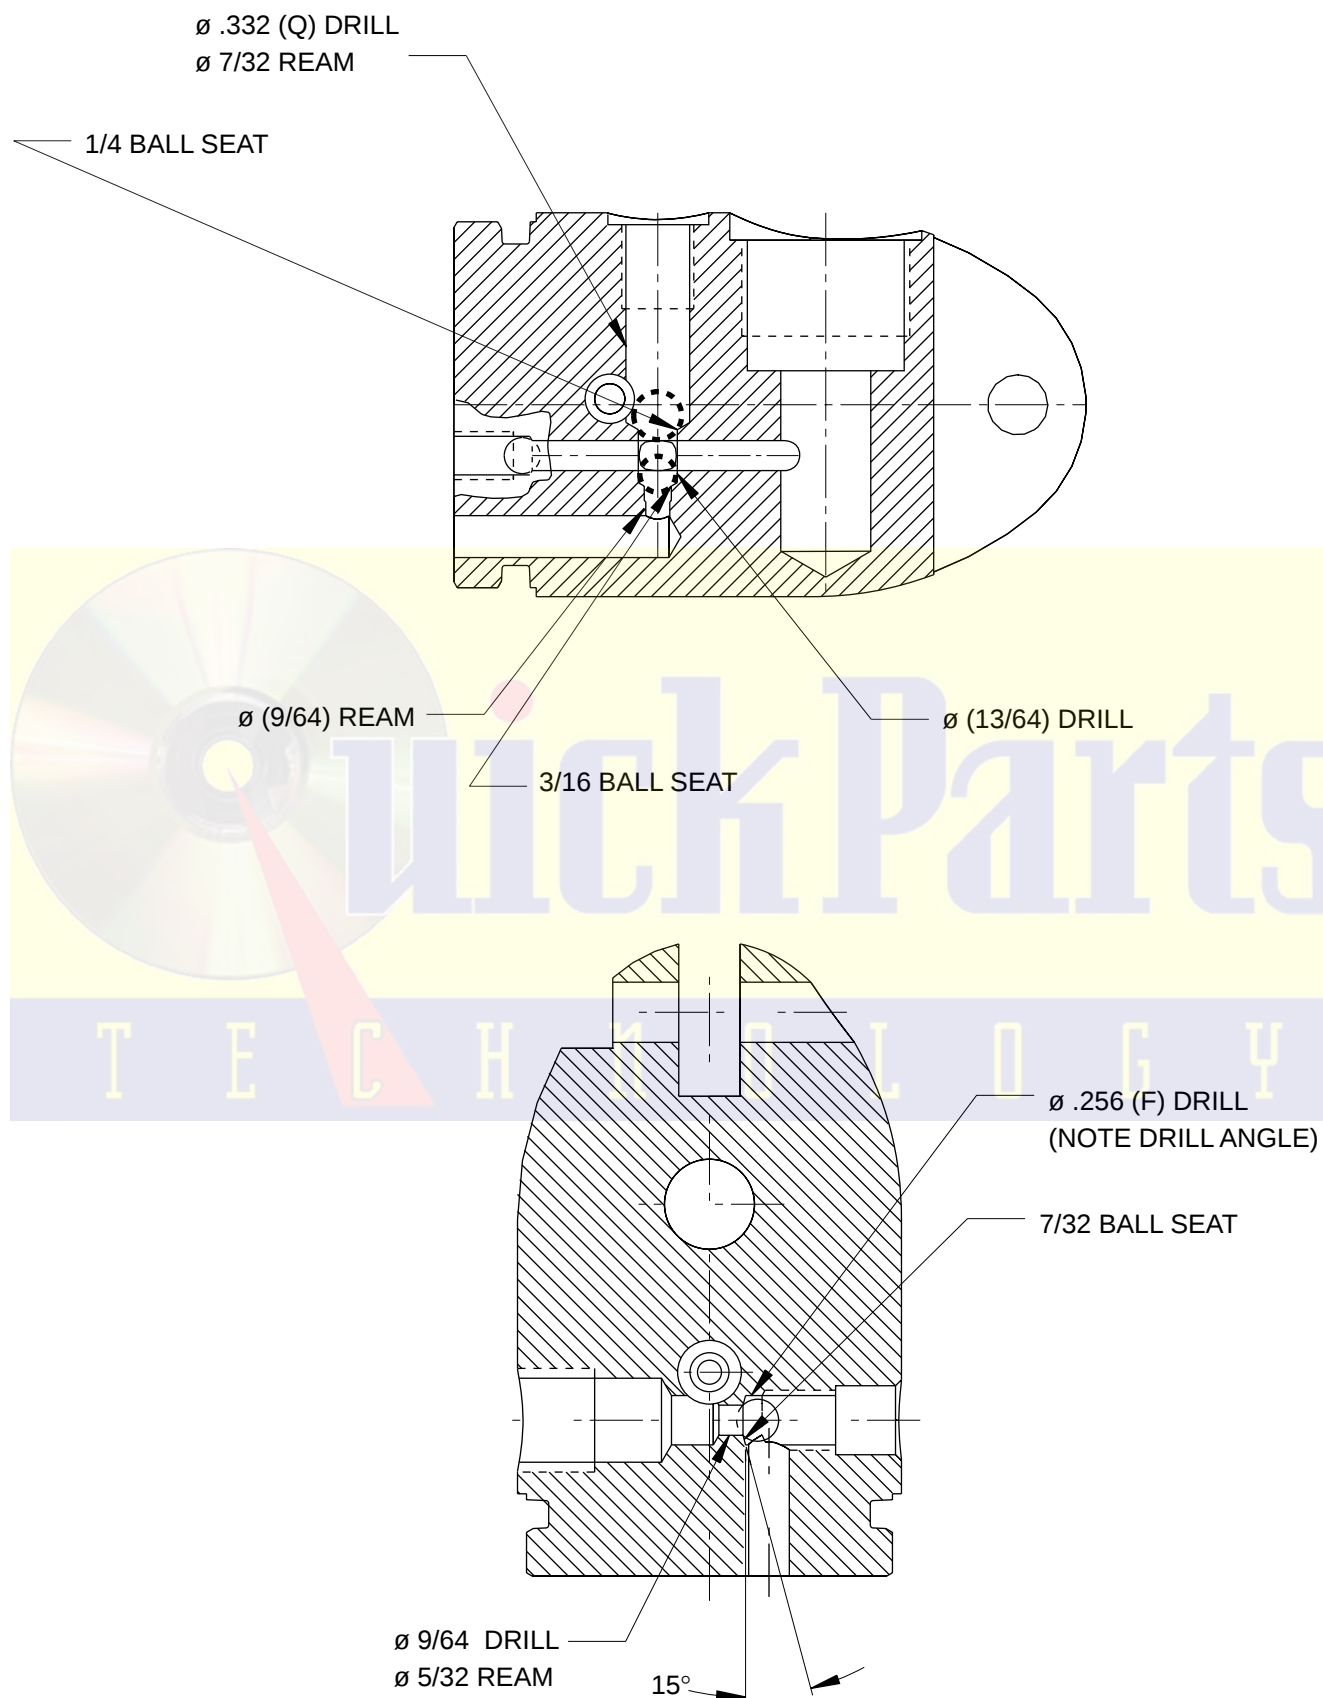

Parts List

KEY	PART NO.	DESCRIPTION	QTY.
1	502 4520.1	Shaft-Knob Unit, Release (includes Key 2)	1
2	905 0418.6	O-Ring, 1/4" x 3/8" x 1/16"	1
3	905 0408.9	O-Ring, 1-5/8" x 1-7/8" x 1/8" (replaces 905 4750.0**) 1	
4	905 0392.9	Street Ell, 45° x 1/4" Male x 1/4" Female Brass Cadmium Plated ...	1
5	501 3281.4	Block Unit, Pump	1
6	905 0407.0	Pin, 5/16" x 7/8"	1
7	500 3424.3	End-Cap	1
8	500 3422.7	Filter	1
9	905 0744.4	Ring, Retaining	1
10	500 3425.1	Tube, Reservoir	1
11	905 3262.7	V-Packing Seal	2
12	503 0241.8	Follower, Reservoir	1
13	500 3441.3	Tube, Intake	1
14	905 0368.6	Screw, 1/4-20 NC x 1/4" Cup Pt. Skt. Set	1
15	905 0678.2	Ball, 3/16" Dia. GR. #1 Chrome Steel	2
16	905 0679.0	Ball, 1/4" Dia. GR. #1 Chrome Steel	1
17	501 3280.6	Washer, Sealing	1
18	905 0776.2	O-Ring, 7/16" x 5/8" x 3/32" (replaces 905 4749.7**) ..	1
19	501 1286.4	Washer, Teflon	1
20	501 3283.0	Nut, Injector Packing	1
21	500 3164.3	Link, Lever	1
22	500 3165.1	Plunger	1
23	905 0449.6	Pin, 5/16" x 1-1/4"	2
24	501 0001.7	Lever	1
25	500 3177.5	Washer, Valve Screw Sealing	1
26	500 3417.0	Screw, Valve	1
27	500 4102.9	Spring, Compression	1
28	905 0418.6	O-Ring, 1/4" x 3/8" x 1/16"	1
29	905 0558.1	Screw, 5/16-18 NC x 1/2" Fillister Head Machine	1
OPTIONAL			
	501 3800.6*	Packing Repair Kit 55D01 to 61BG01 (not shown)	1
	503 0242.6	Packing Repair Kit 61BG01 and Later (not shown)	1
	905 1059.3	Oil, Light Hyd. (not shown)	1 gal.
	905 0806.8	Oil, Light Hyd. (not shown)	1 qt.
	500 0247.3	Decal, Identification/Safety	1

* When using this Kit, the Follower 500 3336.0 must be replaced with 503 0241.8, as the 905 0731.2 "V" Packing has been replaced by 905 3262.7 "V" Packing and cannot be interchanged.

** Fluorocarbon O-Rings used at factory as part of production process.

GREENLEE **TEXTRON**

Greenlee Textron Inc. / Subsidiary of Textron Inc.

4455 Boeing Drive, Rockford, IL 61109-2988 USA

General Offices: 815/397-7070

Customer Center and Field Service: 800/435-0786

Fax (24 Hour) Customer Center: 800/451-2632 • 815/397-1865

Canada Fax (24 Hour) Customer Center: 800/524-2853

Printed in the U.S.A.