




# CTBMM500BK, BL, RD, RG, NG 5 Drawer Pro Series Service Cart

## ASSEMBLY INSTRUCTIONS

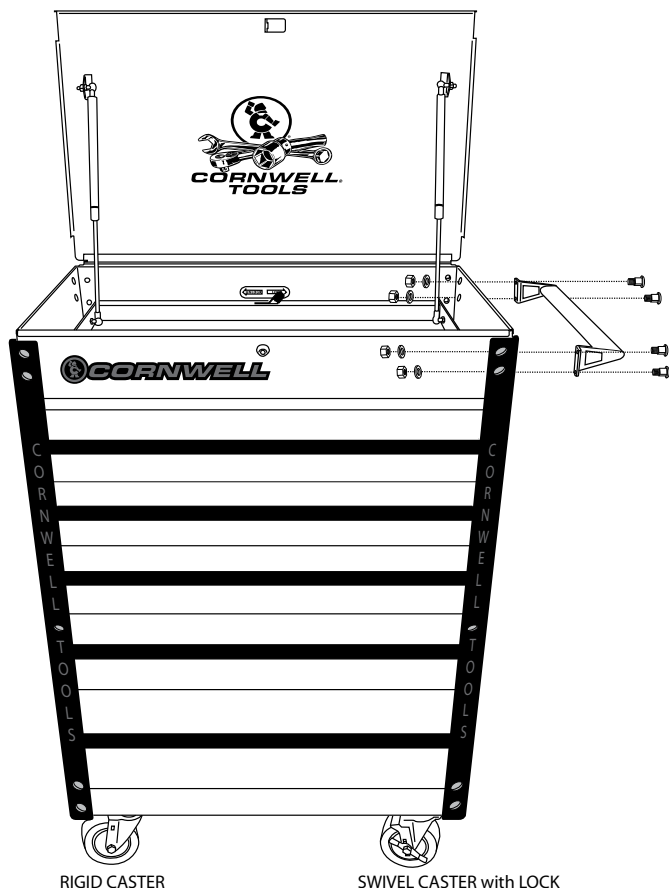

Mount push handle (Part #5) to the same side of the cart as the locking casters using the four stove bolts, washers, and nuts provided.

Using 13mm socket completely tighten all nuts.

## ! WARNING



- Read and follow all instructions in User's Manual.
- Do not load carts beyond rated capacity:  
Maximum Total Net Load ..... 700 Lbs.  
Top 3 Drawers..... 75 Lbs. each  
Bottom 2 Drawers..... 150 Lbs. each

**PLEASE NOTE:** Loading cart beyond rated capacity may cause structural damage to the cart as well as personal and/or property damage. Please educate your customers to the "dangers of overloading".

- Lock lid and drawers before moving.
- Apply brake on locking casters anytime cart is in place.
- Do not pull cart. Push from handle on end to move.
- Units can tip or fall causing damage or personal injury.
- Cart is designed to roll easily on flat surfaces and should not be used on uneven or inclined surfaces.
- Do not open more than one loaded drawer at a time.
- Do not stand on or step in drawers.
- Keep children away from unit.
- Wear gloves when lifting edges.
- This product may contain one or more chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. *Wash hands thoroughly after handling.*
- Failure to heed these warnings may result in personal injury and/or property damage.



## CTBMM500BK, BL, RD, RG, NG 5 Drawer Pro Series Service Cart


### HARDWARE SPECIFICATIONS



**1 x 4 pcs.**  
Flat washer



**2 x 4 pcs.**  
Nylon nut



**3 x 4 pcs.**  
M8 bolt (6mm-19mm)

### TROUBLESHOOTING

Troubleshooting Points for the CTBMM500 Series:

**Problem:** Drawers appear not to fit, do not slide in accurately and bump the cart sides.

**Solution:** The roller bearing slides must be fully engaged into the mounting slots on all drawers. They potentially could fall out of position during shipment. Check the side of the cart to determine which slide is out of position.

Remove the drawer that is out of position. The drawer is removed by the two clips on the actual roller bearing slide.


Simply push the roller bearing slide back down into position.

Insert the drawer back onto the roller bearing slides.

**Problem:** Back Lock/Unlock Switch does not engage the drawer.

**Solution:** The inside Lock/Unlock slide potentially could fall out of its groove during shipment. Unscrew the four screws that are holding the Lock/Unlock slide in place.

Once the screws are removed, simply place the latch back onto the slide and tighten the four screws back down.



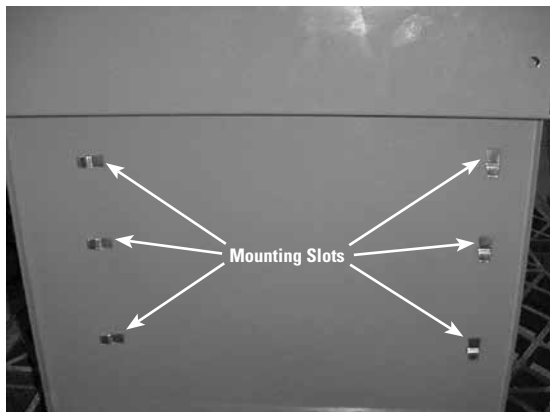




# CTBMM500BK, BL, RD, RG, NG 5 Drawer Pro Series Service Cart

## PARTS LIST

Item #	Part #	Description	QTY.
1		Lid	1
2	RSGP	Gas piston / each	2
3	RSLMC500BKN	Locking mechanism	1
	RSLMC500BLN	(excl lock w/ keys)	
	RSLMC500RDN		
	RSLMC500RGN		
	RSLMC500NGN		
4		Cart frame	1
5	CTBMMHDK	Push handle and bracket kit	1
6	CTBMM100FC	5" fix caster	2
7	RSSWLCS	5" swivel caster with lock	2
8	CTBMM5003DBK	3" drawer	1
	CTBMM5003DBL		
	CTBMM5003DRD		
	CTBMM5003DRG		
	CTBMM5003DNG		
9	CTBMM5004DBK	4" drawer	2
	CTBMM5004DBL		
	CTBMM5004DRD		
	CTBMM5004DRG		
	CTBMM5004DNG		
10	CTBMM5006DBK	6" drawer	1
	CTBMM5006DBL		
	CTBMM5006DRD		
	CTBMM5006DRG		
	CTBMM5006DNG		
11	CTBMM5009DBK	9" drawer	1
	CTBMM5009DBL		
	CTBMM5009DRD		
	CTBMM5009DRG		
	CTBMM5009DNG		
12	RSMM100DH	Drawer handle (Alum.)	5
	RSMM100DHBK	Drawer handle (Black)	5
13-14	RSMM500LK	6 Pack of EVA liners	1 set
15	RSLKN	Lock with keys	1
16	RSRBS	Roller bearing slides	7
	RSRBSDET8PK	Ball Bearing Slide Detents (Package of 8)	1
17	RSMM700BPRF	Right front bumper	1
18	RSMM700BPLF	Left front bumper	1
19	RSMM700BPLR	Left rear bumper	1
20	RSMM700BPRR	Right rear bumper	1
21	RSMM100CLP	Logo Plate	1
a	RSMM700BK2	Hardware kit for push handle (Including 4 each of Bolts 6mm-19mm, Flat washers, Nylon nuts)	1 set
b	RSMM500BF	Bumper fastener	32
c	RSMM700BK1	Hardware kit for the opposite side of push handle (Including 4 each of bolts 3-17mm, Flat washers, Nylon nuts)	1 set
d	RSMM700BK3	Hardware kit for caster (Including 16 Hex bolt M8x16, 16 flat washers, 16 Spring washer)	1 set

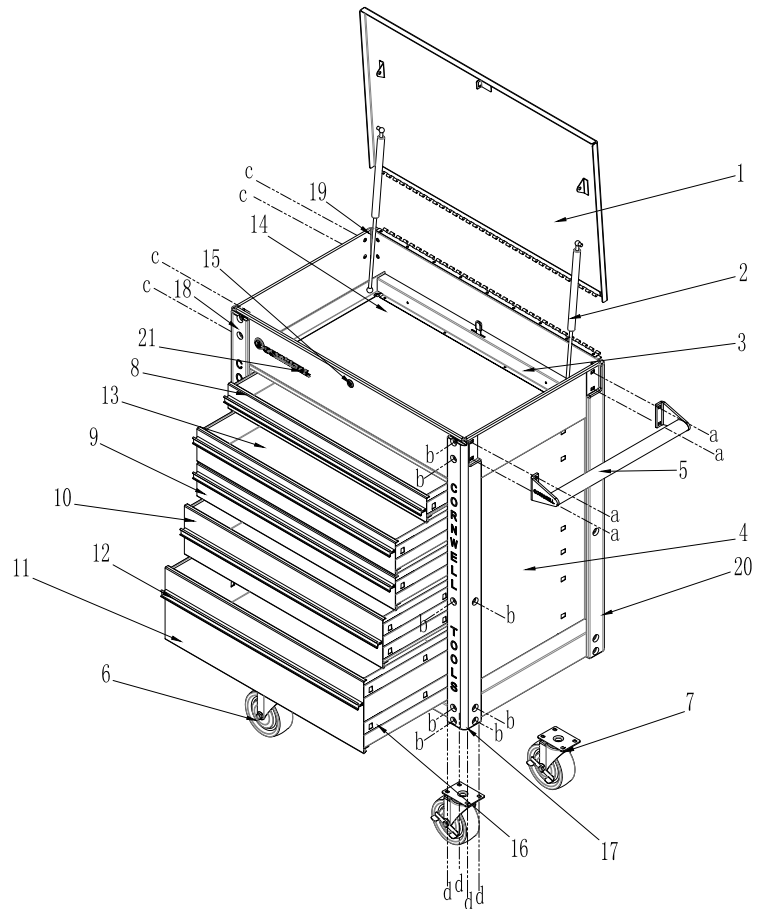

### ALSO AVAILABLE:

RSMM100DHP - End cap for drawer handle