



MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

ASSEMBLY INSTRUCTIONS


Due to the weight of this cart we recommend that **TWO PEOPLE** work together on the assembly. This cart weighs approximately 200 lbs, please use caution during assembly.

Step 1: Locate the key tied to the bottom shelf. Using the key, open the sliding top and remove the caster box from the bottom drawer. Once removed, make sure all drawers are completely closed and the inside lever is in the locked position. Close the sliding top and lock.


Step 2: Lay out a work surface using the protective foam provided. Once this surface is secure, gently turn the cart onto its back.

Step 3: (Before assembling the legs, remove the cable tie holding the bumper in place.) Insert the front leg (Part #7), labeled FL or FR. Then place the front bumper (Part #13) over the leg, aligning the center bolt holes. With holes aligned, insert Torx bolt (Part #1a) and finger tighten.


Step 4: Install back leg (Part #7) labeled BL or BR and bumper (Part #13), following the same procedure as above.

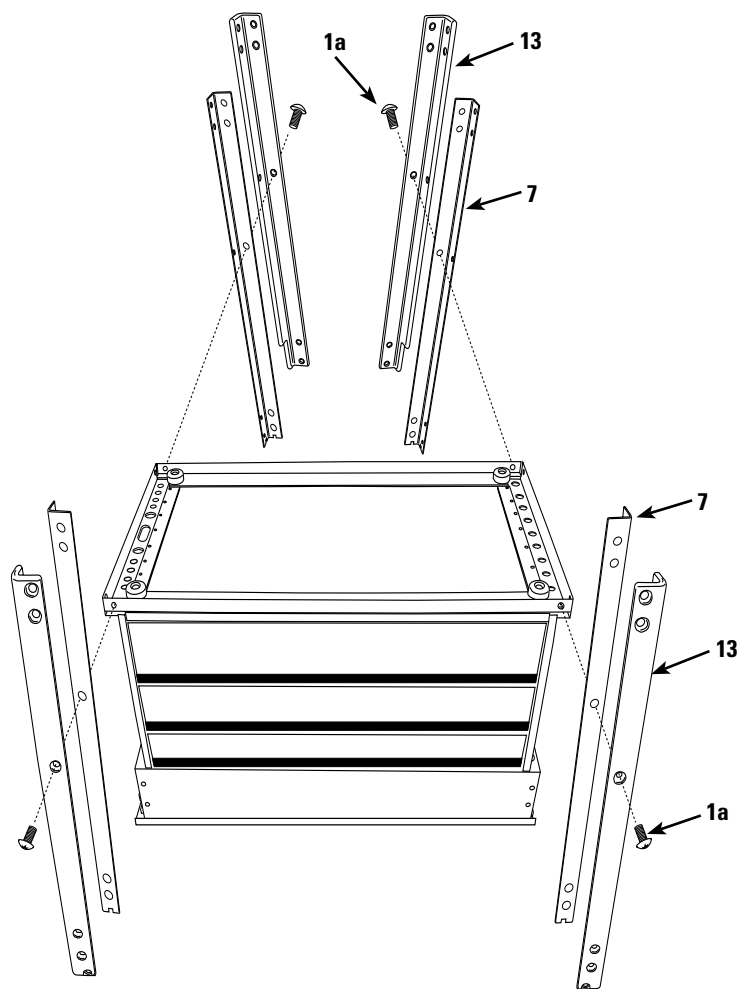

Step 5: Repeat steps 3 & 4 to mount the legs on the opposite side.

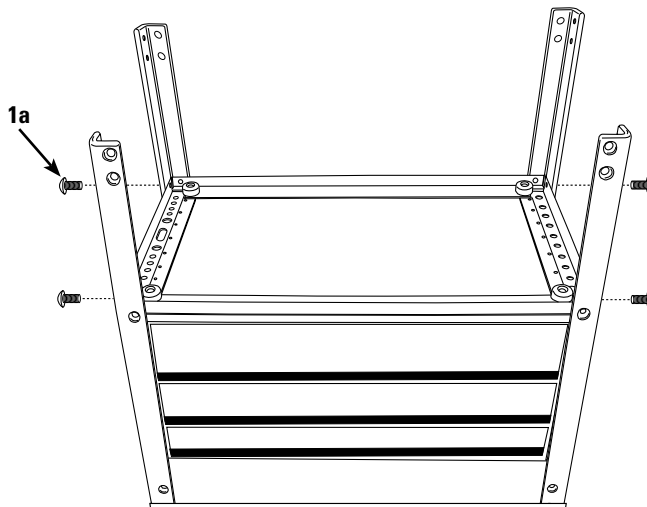

Step 6: Mounting casters: Put the four casters in place. The two locking casters (Part #10) should be on one side of the cart, and the two non locking casters (Part #9) should be on the other (**Left or right side, NOT front or back**). Using the 16 bolts (Part #8), washers, and lock washers (located in separate caster bag), completely tighten the casters to the bottom tray, using a 14mm socket or 14mm combination wrench for the bolt head. (Note: Bolt head, washer and lock washer should be on the inside of the bottom shelf.)

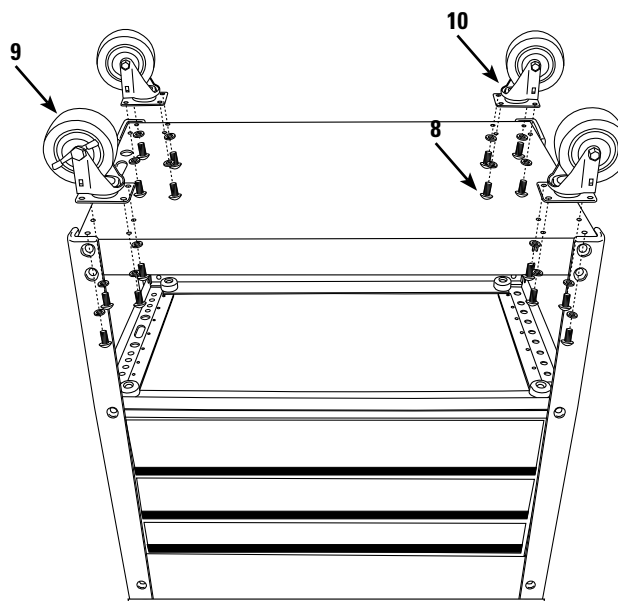




MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

ASSEMBLY INSTRUCTIONS


Step 7: Insert bottom shelf (Part # 18) between the four legs, flat side facing up towards the ceiling. Make sure the side with 3 holes is on the same side as corresponding 3 holes in the middle section and the black tubes at the top. Insert sixteen Torx bolts (Part #1a) and finger tighten.

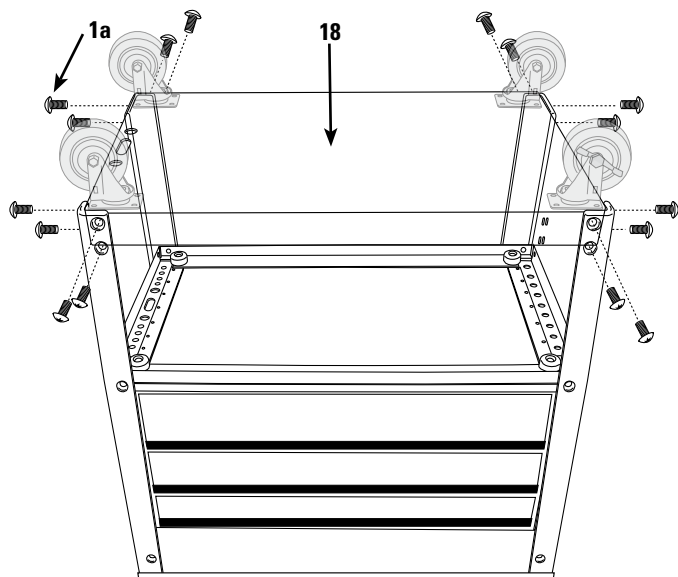


Step 8: Carefully lift cart onto its casters.

Step 9: Open sliding top using the key provided.

Step 10: Assemble the brackets (Part #5) to the comfort grip push handles (Part #6); then mount push handles and brackets to both sides of the cart using the eight Torx bolts (Part #1b) provided. Finger tighten at this time.

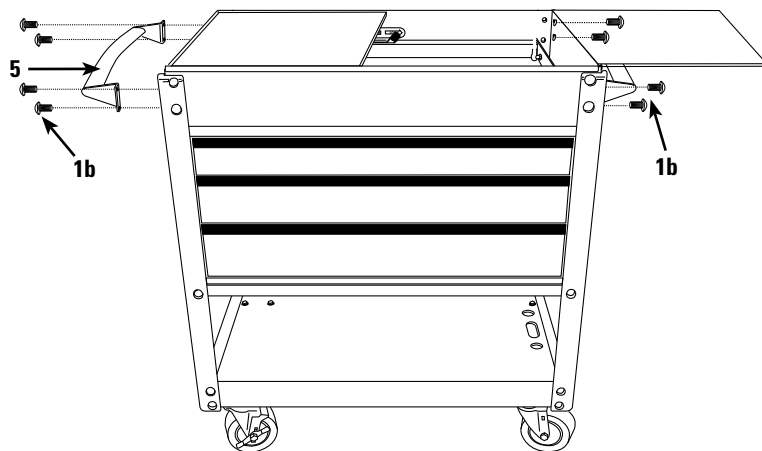

Step 11: Insert the remaining 8 Torx bolts (Part #1a).

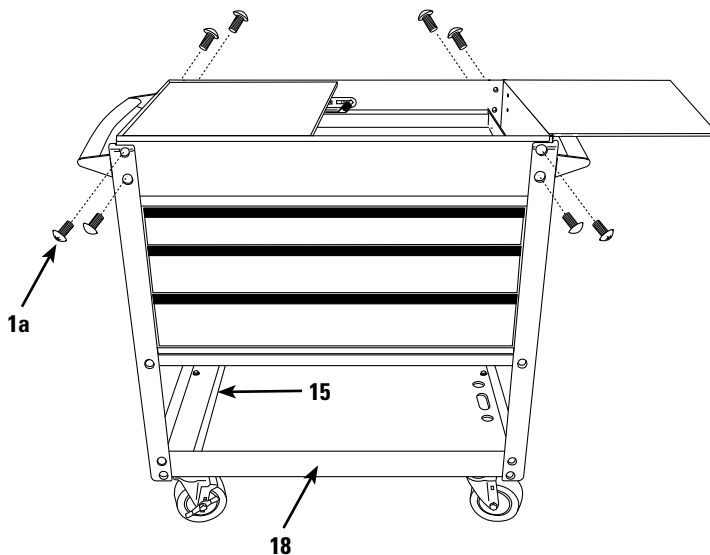


Step 12: Completely tighten all fasteners!!

Step 13: Insert spray can divider (Part #15) into provided channel on the bottom shelf (Part #18).





MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

HARDWARE SPECIFICATIONS



T45 Torx Bolt (M8 x 18) 32 pcs. (1a)

T45 Torx Bolt (M8 x 20) 8 pcs. (1b)



Hex Bolt, Washer, and Lock Washer
(M8 x 20) 16 pcs. (8)

Please Note:

2 extra (M8 x 18) Torx bolts and 2 extra hex bolts (M8 x 20) have been included in case of loss or damage.

TROUBLESHOOTING

Troubleshooting Points during MB195UC Assembly.

Problem: Drawers appear not to fit, do not slide in accurately and bump the cart sides.

Solution: The roller bearing slides must be fully engaged into the mounting slots on all drawers. They potentially could fall out of position while turning the cart on its lid, back, or onto its casters.

Remove the drawer that is out of position. The drawer is removed by the two clips on the roller bearing slides.

Simply push the roller bearing slide back down into position.

Insert the drawer back onto the roller bearing slides.

Problem: Back Lock/Unlock Switch does not engage the drawer.

Solution: The inside Lock/Unlock slide potentially could fall out of its groove while turning the cart on its lid, back, or onto its casters.

Unscrew the four screws that are holding the Lock/Unlock slide in place.

Once the screws are removed simply place the latch back onto the slide and tighten the four screws back down.

! WARNING

SERVICE CART WEIGHT CAPACITY

| | |
|--|--------------|
| Maximum Total Net Load | 600 LBS |
| Top and Bottom Shelf | 150 LBS each |
| Top Two Drawers | 100 LBS each |
| Bottom Drawer | 200 LBS |
| Sliding Work Surface (closed) | 200 LBS |
| Sliding Work Surface (fully extended) | 50 LBS |

PLEASE NOTE: Loading cart beyond rated capacity may cause structural damage to the cart as well as personal and /or property damage. Please educate your customers to the dangers of overloading.




MB195UC, -BK, -BL, -GR, -NG, -OR, -PP, -YE 3 Drawer Deluxe Utility Cart

PARTS LIST


| Item No. | Part No. | No. Req'd | Description |
|----------|---------------|-----------|--|
| 1a | RS195UCBK | 1 | Set of 32 M80x18 Torx Bolts |
| 1b | | 1 | 8 M80x20 Torx Bolts (4 included w/ each #5) |
| 5 | RS195UCHB | 2 | Push Handle Brackets/Pair with Hardware |
| 6 | RS190UCHDL | 2 | Push Handle |
| 7 | RS195UCLG-R | 4 | Red Leg/each |
| | RS195UCLG-BK | | Black Leg/each |
| | RS195UCLG-BL | | Blue Leg/each |
| | RS195UCLG-GR | | Green Leg/each |
| | RS195UCLG-NG | | Neon Green Leg/each |
| | RS195UCLG-OR | | Orange Leg/each |
| | RS195UCLG-PP | | Purple Leg/each |
| | RS195UCLG-Y | | Yellow Leg/each |
| 8 | RC195UCCB | 1 | Set Of 16 M8x20 Bolts, Washers, and Lock Washers (for casters) |
| 9 | RS195CS | 2 | Swivel Caster /each |
| 10 | RS195LCS | 2 | Swivel Caster with Lock /each |
| 11 | RSBKT | 2 | Bracket for Paper Storage Area |
| 12 | RS190UCHBK | 3 | Black Drawer Handle/each |
| 13 | RS190UCBP | 1 | Set of 4 Bumpers |
| 14 | RSLKA | 1 | Lock with Keys |
| 14a | RS190UCLRT | 1 | Rod, Bracket, and Pin |
| 15 | RSSCD-R | 1 | Red Spray Can Divider |
| | RSSCD-BK | | Black Spray Can Divider |
| | RSSCD-BL | | Blue Spray Can Divider |
| | RSSCD-GR | | Green Spray Can Divider |
| | RSSCD-NG | | Neon Green Spray Can Divider |
| | RSSCD-OR | | Orange Spray Can Divider |
| | RSSCD-PP | | Purple Spray Can Divider |
| | RSSCD-Y | | Yellow Spray Can Divider |
| 16 | MBD195UC1 | 2 | Red 3" Drawer |
| | MBD195UC1-BK | | Black 3" Drawer |
| | MBD195UC1-BL | | Blue 3" Drawer |
| | MBD195UC1-GR | | Green 3" Drawer |
| | MBD195UC1-NG | | Neon Green 3" Drawer |
| | MBD195UC1-OR | | Orange 3" Drawer |
| | MBD195UC1-PP | | Purple 3" Drawer |
| | MBD195UC1-YE | | Yellow 3" Drawer |
| 17 | MBD195UC2 | 1 | Red 6" Drawer |
| | MBD195UC2-BK | | Black 6" Drawer |
| | MBD195UC2-BL | | Blue 6" Drawer |
| | MBD195UC2-GR | | Green 6" Drawer |
| | MBD195UC2-NG | | Neon Green 6" Drawer |
| | MBD195UC2-OR | | Orange 6" Drawer |
| | MBD195UC2-PP | | Purple 6" Drawer |
| | MBD195UC2-YE | | Yellow 6" Drawer |
| 18 | MBS195UC | 1 | Red Bottom Shelf |
| | MBS195UC-BK | | Black Bottom Shelf |
| | MBS195UC-BL | | Blue Bottom Shelf |
| | MBS195UC-GR | | Green Bottom Shelf |
| | MBS195UC-NG | | Neon Green Bottom Shelf |
| | MBS195UC-OR | | Orange Bottom Shelf |
| | MBS195UC-PP | | Purple Bottom Shelf |
| | MBS195UC-YE | | Yellow Bottom Shelf |
| 19 | RS190UCPBT | 3 | Prybar Tube/each |
| 20 | RS190UCLMR | 1 | Red Locking Mechanism |
| | RS190UCLMBK | | Black Locking Mechanism |
| | RS190UCLMBL | | Blue Locking Mechanism |
| | RS190UCLMGR | | Green Locking Mechanism |
| | RS190UCLMNG | | Neon Green Locking Mechanism |
| | RS190UCLMOR | | Orange Locking Mechanism |
| | RS190UCLMPP | | Purple Locking Mechanism |
| | RS190UCLMYE | | Yellow Locking Mechanism |
| 21 | MB195UCSTP | 1 | Red Sliding Top with Paper Storage |
| | MB195UCSTPBK | | Black Sliding Top with Paper Storage |
| | MB195UCSTPBL | | Blue Sliding Top with Paper Storage |
| | MB195UCSTPGR | | Green Sliding Top with Paper Storage |
| | MB195UCSTPNG | | Neon Green Sliding Top with Paper Storage |
| | MB195UCSTPOR | | Orange Top with Paper Storage |
| | MB195UCSTPPP | | Purple Sliding Top with Paper Storage |
| | MB195UCSTPYE | | Yellow Sliding Top with Paper Storage |
| 22 | MB195UCSTLK | 1 | Red Sliding Top with Lock |
| | MB195UCSTLKBK | | Black Sliding Top with Lock |
| | MB195UCSTLKBK | | Blue Sliding Top with Lock |
| | MB195UCSTLKGR | | Green Sliding Top with Lock |
| | MB195UCSTLKNG | | Neon Green Sliding Top with Lock |
| | MB195UCSTLKOR | | Orange Top with Lock |
| | MB195UCSTLKPP | | Purple Sliding Top with Lock |
| | MB195UCSTLKYE | | Yellow Sliding Top with Lock |

Also available:

| | |
|--------------|---|
| RSSCPK | Service Cart Polishing Kit |
| RS195SL | Roller Bearing Slides with 2 #6 Screws for Drawer/pair |
| RS195SLT | Roller Bearing Slides with 15 Steel Rivets for Sliding Top/pair |
| RSMB190UCMLP | MAC Logo Plate |
| RS195UC6LK | 6 Piece Liner Kit |

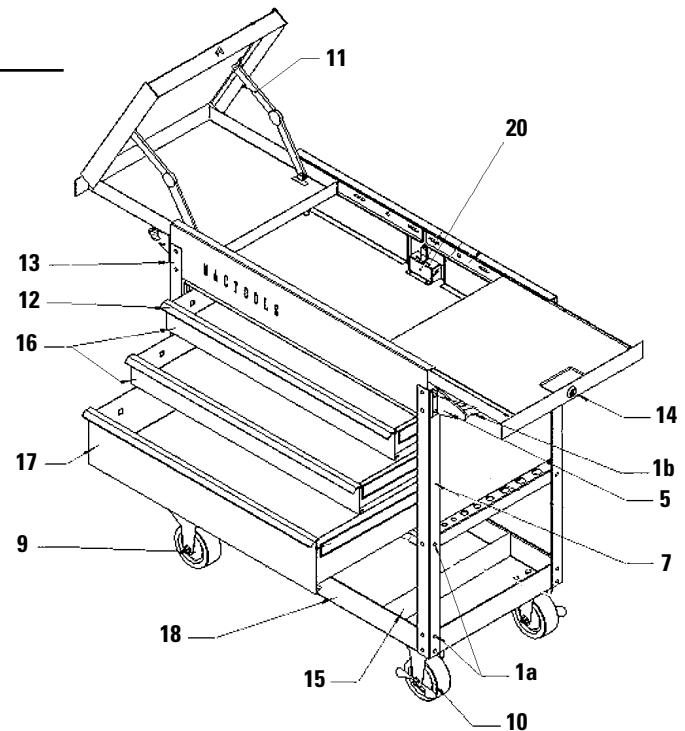

PART DRAWINGS

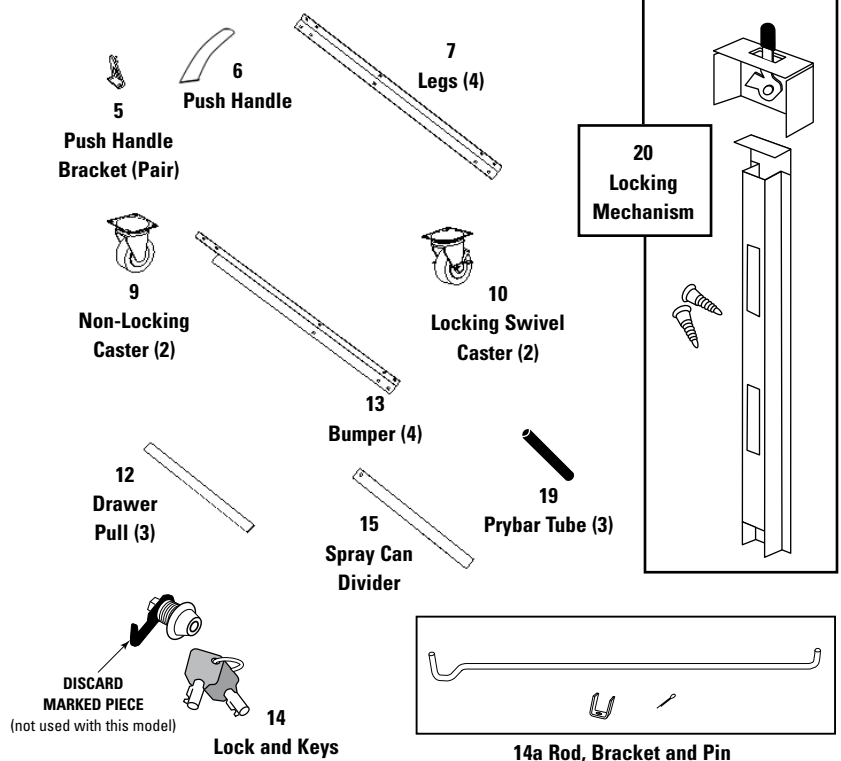

L-Shaped hex key included for adjusting the tension on the RSBKT bracket (item no.11)

TOOLS NEEDED FOR ASSEMBLY:

T45 Torx Driver or Torx Key
14mm Combination Wrench,
Socket, or Universal Socket
4" Extension
Ratchet